

# DRAFT AIA Document G701™ - 2001

## Change Order

|                                                                                                                                                 |                                                                                                                                |                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PROJECT (Name and address):</b><br>Radcliff Elementary School Renovation<br>- Phase 3<br>1145 S. Dixie Boulevard<br>Radcliff, Kentucky 40160 | <b>CHANGE ORDER NUMBER:</b> 006<br><b>DATE:</b> June 16, 2011                                                                  | <b>OWNER:</b> <input checked="" type="checkbox"/><br><b>ARCHITECT:</b> <input checked="" type="checkbox"/><br><b>CONTRACTOR:</b> <input checked="" type="checkbox"/><br><b>FIELD:</b> <input checked="" type="checkbox"/><br><b>KENTUCKY DEPARTMENT OF EDUCATION:</b> <input type="checkbox"/> |
| <b>TO CONTRACTOR (Name and address):</b><br>Morel Construction Co., Inc.<br>627 West Main Street<br>Louisville, Kentucky 40202                  | <b>ARCHITECT'S PROJECT NUMBER:</b> 1004<br><b>CONTRACT DATE:</b> January 10, 2011<br><b>CONTRACT FOR:</b> General Construction |                                                                                                                                                                                                                                                                                                |

### THE CONTRACT IS CHANGED AS FOLLOWS:

(Include, where applicable, any undisputed amount attributable to previously executed Construction Change Directives)

Electrical requirements for the food service equipment listed below have changed since construction began. Although this equipment is the same manufacturer as designed, the electrical requirements per the manufacturer changed after start of construction, and electrical revisions are necessary to accommodate the equipment.

- 1) Booster Heater (Item #10) - Revise breaker from 125/3 to 100/3. Revise wire and conduit size from 3#1/0, 1#6, 2"C to 3#1, 1#8, 1-1/2"C. Revise disconnect switch from 200A to 100A.
- 2) Combi-Oven (Item #35) - Revise breaker from 70/3 to 50/3. Revise wire and conduit size from 3#4, 1#8, 1-1/2"C to 3#6, 1#10, 1"C.
- 3) Combi-Oven (Item #35A) - Revise breaker from 125/3 to 80/3. Revise wire and conduit size from 3#1/0, 1#6, 2"C to 3#3, 1#8, 1-1/2"C.
- 4) Dishwasher (Item #11) - Revise breaker from 70/3 to 90/3. Revise wire size from 3#4, 1#8, 1-1/2"C to 3#2, 1#8, 1-1/2"C.

The original Contract Sum was  
The net change by previously authorized Change Orders  
The Contract Sum prior to this Change Order was  
The Contract Sum will be increased by this Change Order in the amount of  
The new Contract Sum including this Change Order will be

|    |              |
|----|--------------|
| \$ | 5,088,000.00 |
| \$ | 28,699.00    |
| \$ | 5,116,699.00 |
| \$ | 231.00       |
| \$ | 5,116,930.00 |

The Contract Time will be increased by Zero (0) days.  
The date of Substantial Completion as of the date of this Change Order therefore is November 25, 2011.

**NOTE:** This Change Order does not include changes in the Contract Sum, Contract Time or Guaranteed Maximum Price which have been authorized by Construction Change Directive until the cost and time have been agreed upon by both the Owner and Contractor, in which case a Change Order is executed to supersede the Construction Change Directive.

### NOT VALID UNTIL SIGNED BY THE ARCHITECT, CONTRACTOR AND OWNER.

**Sherman Carter Barnhart Architects PSC**  
**ARCHITECT (Firm name)**

100 Mallard Creek Road, Suite 151,  
Louisville, Kentucky 40207

**ADDRESS**

**BY (Signature)**

Kenny Stanfield AIA

**(Typed name)**

**DATE**

**Morel Construction Co., Inc.**  
**CONTRACTOR (Firm name)**

627 West Main Street, Louisville,  
Kentucky 40202

**ADDRESS**

**BY (Signature)**

Richard A. Clauson

**(Typed name)**

**DATE**

**Hardin County Schools**  
**OWNER (Firm name)**

65 W.A. Jenkins Road, Elizabethtown,  
Kentucky 42701

**ADDRESS**

**BY (Signature)**

Nannette Johnston

**(Typed name)**

**DATE**



627 West Main Street  
Louisville, KY 40202  
502-568-6200 Fax 502-568-6234

## REQUEST FOR CHANGE ORDER

### MOREL CONSTRUCTION Co., LLC

SHERMAN CARTER BARNHART  
100 Mallard Creek Rd., Suite 151  
Louisville, KY 40207-5133

Attn: Ms. Myra Vaughn

Request No. 7

X-No. 10

Project Radcliff Elementary - Phase 3

Project No. 11-01

We hereby request your formal Change Order to our contract for the following changes in the Scope of Work.

Revise power to Food Service Equipment per P.R. 4. Please expedite review/approval. Delivery 3 weeks!!!

Electrical

\$215.00

Subtotal \$215.00

7.5% Overhead and Profit \$16.00

Total ADDITIONAL amount of this Request for Change Order \$231.00

This Request is Valid for 10 Days  
A Time Extension of 0 Days is Included in this Request

- A. We are proceeding with this work as per verbal authorization of \_\_\_\_\_
- B. We have completed this work as per verbal authorization of \_\_\_\_\_
- ~~C. We will proceed with this work only upon receipt of this signed authorization or formal Change Order.~~

SIGNED: \_\_\_\_\_

DATE: \_\_\_\_\_

MOREL CONSTRUCTION Co., LLC

1. ORIGINAL - Architect
2. COPY - Owner/Architect File
3. COPY - X File

By: Richard A. Clauson  
Richard A. Clauson - Vice President

May 26, 2011  
Date

# COPY



## AIA® Document G709™ – 2001

### Work Changes Proposal Request

**PROJECT (Name and address):**  
Radcliff Elementary School  
Renovation - Phase 3  
1145 S. Dixie Boulevard  
Radcliff, Kentucky 40160

**OWNER (Name and address):**  
Hardin County Schools  
65 W.A. Jenkins Road  
Elizabethtown, Kentucky 42701

**FROM ARCHITECT (Name and address):**  
Sherman Carter Barnhart Architects  
PSC  
109 Mallard Creek Road, Suite 151  
Louisville, Kentucky 40207

**TO CONTRACTOR (Name and address):**  
Morel Construction Co., Inc.  
627 West Main Street  
Louisville, Kentucky 40202

PROPOSAL REQUEST NUMBER: 004

DATE OF ISSUANCE: April 21, 2011

CONTRACT FOR: General Construction

CONTRACT DATE: January 10, 2011

ARCHITECT'S PROJECT NUMBER: 1004

OWNER: ☒

ARCHITECT: ☒

CONSULTANT: ☒

CONTRACTOR: ☒

FIELD: ☐

CA: ☒

Please submit an itemized proposal for changes in the Contract Sum and Contract Time for proposed modifications to the Contract Documents described herein. Within Zero (0) days, the Contractor must submit this proposal or notify the Architect, in writing, of the date on which proposal submission is anticipated.

**THIS IS NOT A CHANGE ORDER, A CONSTRUCTION CHANGE DIRECTIVE OR A DIRECTION TO PROCEED WITH THE WORK DESCRIBED IN THE PROPOSED MODIFICATIONS.**

**DESCRIPTION (Insert a written description of the Work):**

Summary of revisions:

a) Booster Heater (Item #10) - Revise breaker from 125/3 to 100/3. Revise wire and conduit size from 3#1/0, 1#6, 2"C to 3#1, 1#8, 1-1/2"C. Revise disconnect switch from 200A to 100A.

b) Combi-Oven (Item #35) - Revise breaker from 70/3 to 50/3. Revise wire and conduit size from 3#4, 1#8, 1-1/2"C to 3#6, 1#10, 1"C.

c) Combi-Oven (Item #35A) - Revise breaker from 125/3 to 80/3. Revise wire and conduit size from 3#1/0, 1#6, 2"C to 3#3, 1#8, 1-1/2"C.

d) Dishwasher (Item #11) - Revise breaker from 70/3 to 90/3. Revise wire size from 3#4, 1#8, 1-1/2"C to 3#2, 1#8, 1-1/2"C.

Provide credit amounts for revisions to Booster Heater (Item #10), Combi-Oven (Item #35), and Combi-Oven (Item #35A). Provide amount of additional cost for revision to Dishwasher (Item #11). Refer to attached drawing and revised electrical schedules.

**ATTACHMENTS** *(List attached documents that support description):*

Drawing E4.1A "Enlarged Kitchen Plan - Power"  
E5.3E Schedules - Electrical  
E5.3F Schedules - Electrical

REQUESTED BY THE ARCHITECT:

*(Signature)*

Myra Vaughn, Project Architect  
*(Printed name and title)*

# E4.1A

**SHROUT & WILSON**  
MECHANICAL & ELECTRICAL  
110 BURT ROAD • LEXINGTON, KENTUCKY 40503  
PH: 502-271-8177 • FAX: 502-271-4372

**PROJECT NAME:**  
RENOVATION TO RADCLIFF ELEMENTARY - PHASE 3

**PROJECT LOCATION:**  
RADCLIFF, KENTUCKY

**DRAWN:** JR

**DATE:** 04/19/11

**PROJECT NO.:** 1004

## ENLARGED KITCHEN PLAN - POWER

### SHEET NOTES:

- PROVIDE AND INSTALL A 240 VOLT, 100 AMP, 3-WIRE, NON-FUSED DISCONNECT SWITCH IN A NEMA 4X ENCLOSURE FOR CONNECTION TO BOOSTER HEATER. INSTALL BELOW COUNTER, ADJACENT TO HEATER. INSTALL AS REQUIRED TO PROVIDE CLEAR ACCESS IN FRONT OF DISCONNECT.

REVISION  
04.18.2011

1/4" = 1'-0"



2

## ENLARGED KITCHEN PLAN - POWER

1/4" = 1'-0"

1

## ENLARGED KITCHEN PLAN - POWER

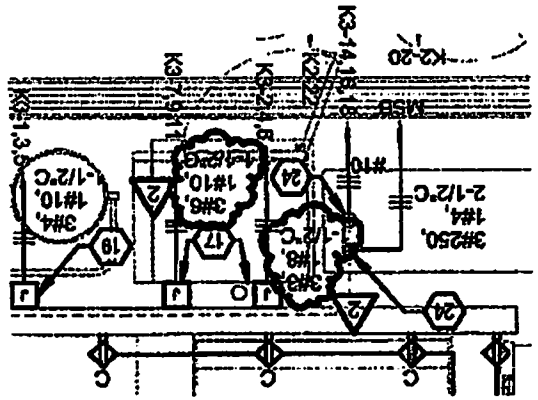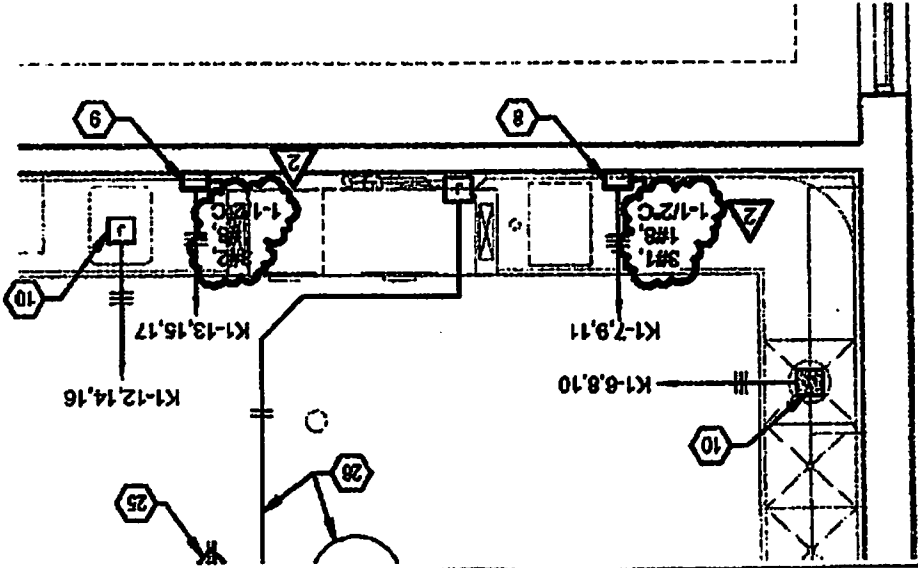

REVISION:  
04.18.2011

|                                                           |                   |
|-----------------------------------------------------------|-------------------|
| DATE: 04/18/11                                            | PROJECT NO: 1004  |
| DRAWN BY: JR                                              | CHECKED BY: WC/TW |
| PROJECT NAME: RENOVATION TO RADCLIFF ELEMENTARY - PHASE 3 |                   |
| PROJECT LOCATION: RADCLIFF, KENTUCKY                      |                   |

| PANEL NAME: K1                     |         |                   |                     |             |  |                   |  |                  |  |
|------------------------------------|---------|-------------------|---------------------|-------------|--|-------------------|--|------------------|--|
| VOLTAGE<br>120/208 V <sub>ph</sub> |         | 3 PHASE<br>4 WIRE |                     | POLES<br>42 |  | MAIN AMP<br>400 A |  | MAIN TYPE<br>MLO |  |
| POLE                               | BREAKER | LOAD              |                     | PHASE LOADS |  | A                 |  | B                |  |
| NO.                                | TRIP    | P                 | SERVED              | C           |  | A                 |  | B                |  |
| K1-1                               | 20 A    | 1                 | LTS 132             | 1400 VA     |  | 1200 VA           |  | 500 VA           |  |
| K1-3                               | 20 A    | 1                 | RCPT 130            | 500 VA      |  | 500 VA            |  | 500 VA           |  |
| K1-5                               | 20 A    | 1                 | RCPT 130            | 500 VA      |  | 500 VA            |  | 500 VA           |  |
| K1-7                               | 100 A   | 3                 | BOOSTER HEATER 132  | 12000 VA    |  | 12000 VA          |  | 400 VA           |  |
| K1-9                               | 20 A    | 1                 | DISHWASHER 132      | 6000 VA     |  | 6000 VA           |  | 400 VA           |  |
| K1-11                              | 20 A    | 1                 | DISHWASHER 132      | 6000 VA     |  | 6000 VA           |  | 400 VA           |  |
| K1-13                              | 20 A    | 1                 | DISHWASHER 132      | 6000 VA     |  | 6000 VA           |  | 400 VA           |  |
| K1-15                              | 20 A    | 1                 | COOLER/REFRIG. ALUM | 1000 VA     |  | 1000 VA           |  | 400 VA           |  |
| K1-17                              | 20 A    | 1                 | COOLER/REFRIG. LTS  | 1000 VA     |  | 1000 VA           |  | 400 VA           |  |
| K1-19                              | 20 A    | 1                 | COOLER/REFRIG. LTS  | 1000 VA     |  | 1000 VA           |  | 400 VA           |  |
| K1-21                              | 20 A    | 1                 | DISPOSAL 131        | 400 VA      |  | 400 VA            |  | 700 VA           |  |
| K1-23                              | 15 A    | 3                 | DISPOSAL 131        | 400 VA      |  | 400 VA            |  | 700 VA           |  |
| K1-25                              | 15 A    | 3                 | DISPOSAL 131        | 400 VA      |  | 400 VA            |  | 700 VA           |  |
| K1-27                              | 15 A    | 3                 | DISPOSAL 131        | 400 VA      |  | 400 VA            |  | 700 VA           |  |
| K1-29                              | 35 A    | 3                 | FREEZER CONDENSER   | 4000 VA     |  | 4000 VA           |  | 1200 VA          |  |
| K1-31                              | 35 A    | 3                 | FREEZER CONDENSER   | 4000 VA     |  | 4000 VA           |  | 1200 VA          |  |
| K1-33                              | 20 A    | 1                 | DOOR AIR CURTAINS   | 500 VA      |  | 500 VA            |  | 500 VA           |  |
| K1-35                              | 20 A    | 1                 | DOOR AIR CURTAINS   | 500 VA      |  | 500 VA            |  | 500 VA           |  |
| K1-37                              | 20 A    | 1                 | SPARE               | 500 VA      |  | 500 VA            |  | 500 VA           |  |
| K1-39                              | 20 A    | 1                 | SPARE               | 500 VA      |  | 500 VA            |  | 500 VA           |  |
| K1-41                              | 20 A    | 1                 | SPARE               | 500 VA      |  | 500 VA            |  | 500 VA           |  |
| PHASE TOTAL                        |         |                   |                     | 2864 VA     |  | 2864 VA           |  | 2864 VA          |  |
|                                    |         |                   |                     | 286 A       |  | 286 A             |  | 286 A            |  |

\* CIRCUIT BREAKER TO BE GFI PROTECTED

REVISION  
04.18.2011

# E63F SCHEDULES - ELECTRICAL

SHROUT TATE & WILSON  
MECHANICAL • ELECTRICAL

DATE: 04/18/11 PROJECT NO: 1004

DRAWN BY: JR CHECKED BY: WGTW

PROJECT NAME: RENOVATION TO RADCLIFF ELEMENTARY - PHASE 3  
PROJECT LOCATION: RADCLIFF, KENTUCKY

**COPY**

**ALTERNATIVE**  
ELECTRICAL SERVICES INC

May 25, 2011

Mr. Rick Clauson  
Morel Construction Company  
627 West Main Street  
Louisville, KY 40202

RE: Radcliff Middle School Renovation Ph 3  
PR- 004 Kitchen Equipment

Dear Mr. Clauson,

I am sending you pricing with breakdown to install conduit, wiring and equipment connections per PR-004 per attached labor and bill of materials. If accepted please add the total amount to our contract.

Total Increase Amount This Change Request \$ 215.00

If you have any questions or need further information, please do not hesitate to contact our office.

Sincerely,

Alternative Electrical Services, Inc

*Robert Eckenfels*

Robert Eckenfels  
Ex. Vice President

CHANGE PRICING  
LABOR AND MATERIALS BREAKDOWN FORM

One Of Three

|                                |                          |
|--------------------------------|--------------------------|
| Contractor/Subcontractor Name: | Morel Const              |
| Request:                       | PR- 004                  |
| Description                    | Revise kitchen equipment |
| Contact Person:                | Bobby Eckenfels          |
| Date:                          | 25-May-11                |

| Item No | Item Description        | Material Cost |       |         | Man Hours |          | Labor Cost |          |
|---------|-------------------------|---------------|-------|---------|-----------|----------|------------|----------|
|         |                         | Quantity      | Unit  | Total   | Unit      | Total    | Unit       | Total    |
| 1       | booster heater Item #10 |               |       |         |           |          |            |          |
| 2       | CH 125 amp 3 pole       | -1            | 144.9 | -144.9  | 1.25      | -1.25    | 62         | -77.5    |
| 3       | 2" PVC                  | -40           | 2.31  | -92.4   | 0.089     | -3.56    | 62         | -220.72  |
| 4       | 2" PVC CONN             | -2            | 2.2   | -4.4    | 0.296     | -0.592   | 62         | -36.704  |
| 5       | 2" PVC COUPL            | -2            | 2.2   | -4.4    | 0.296     | -0.592   | 62         | -36.704  |
| 6       | 2" PVC 90               | -2            | 6.27  | -12.54  | 0.5       | -1       | 62         | -62      |
| 7       | 2" GREENFIELD           | -5            | 2.36  | -11.8   | 0.2       | -1       | 62         | -62      |
| 8       | 2" GREENFIELD CONN      | -2            | 15.29 | -30.58  | 0.286     | -0.572   | 62         | -35.464  |
| 9       | NO. 6 THHN WIRE         | -42           | 0.6   | -25.2   | 0.012     | -0.51702 | 62         | -32.0552 |
| 10      | NO. 1/0 THHN WIRE       | -126          | 2.34  | -294.84 | 0.024     | -3.05424 | 62         | -189.363 |
| 11      | 200 AMP DISCONNECT      | -1            | 1234  | -1234   | 5.154     | -5.154   | 62         | -319.548 |
| 12      |                         |               |       |         |           |          |            |          |
| 13      | CH 100 AMP 3P BREAKER   | 1             | 412.9 | 412.85  | 1.25      | 1.25     | 62         | 77.5     |
| 14      | 1 1/2" PVC              | 40            | 1.49  | 59.6    | 0.073     | 2.92     | 62         | 181.04   |
| 15      | 1 1/2" PVC CONN         | 2             | 1.24  | 2.48    | 0.229     | 0.458    | 62         | 28.396   |
| 16      | 1 1/2" PVC COUPL        | 2             | 1.24  | 2.48    | 0.229     | 0.458    | 62         | 28.396   |
| 17      | 1 1/2" PVC 90           | 2             | 3.16  | 6.32    | 0.286     | 0.572    | 62         | 35.464   |
| 18      | 1 1/2" GREENFIELD       | 5             | 1.61  | 8.05    | 0.16      | 0.8      | 62         | 49.6     |
| 19      | 1 1/2" GREENFIELD CONN  | 2             | 10.75 | 21.5    | 0.2       | 0.4      | 62         | 24.8     |
| 20      | NO. 8 THHN WIRE         | 42            | 0.4   | 16.8    | 0.01      | 0.42     | 62         | 26.04    |
| 21      | NO. 1 THHN WIRE         | 126           | 1.97  | 248.22  | 0.02      | 2.52     | 62         | 156.24   |
| 22      | 100 AMP DISCONNECT      | 1             | 1390  | 1197    | 4.211     | 4.211    | 62         | 261.082  |
| 23      |                         |               |       |         |           |          |            |          |
| 24      | Combi Oven item #35     |               |       |         |           |          |            |          |
| 25      | CH 70 AMP 3P BREAKER    | -1            | 72.45 | -72.45  | 1.25      | -1.25    | 62         | -77.5    |
| 26      | 1 1/2" PVC              | -20           | 1.49  | -29.8   | 0.073     | -1.46    | 62         | -90.52   |
| 27      | 1 1/2" PVC CONN         | -2            | 1.25  | -2.5    | 0.229     | -0.458   | 62         | -28.396  |
| 28      | 1 1/2" PVC COUPL        | -2            | 1.25  | -2.5    | 0.229     | -0.458   | 62         | -28.396  |
| 29      | 1 1/2" PVC 90           | -2            | 3.16  | -6.32   | 0.286     | -0.572   | 62         | -35.464  |
| 30      | 1 1/2" GREENFIELD       | -5            | 1.61  | -8.05   | 0.16      | -0.8     | 62         | -49.6    |
| 31      | 1 1/2" GREENFIELD CONN  | -2            | 10.75 | -21.5   | 0.2       | -0.4     | 62         | -24.8    |
| 32      | NO. 8 THHN WIRE         | -25           | 0.4   | -10     | 0.01      | -0.25    | 62         | -15.5    |
| 33      | NO. 4 THHN WIRE         | -75           | 1     | -75     | 0.015     | -1.13175 | 62         | -70.1685 |
| 34      | CH 50 AMP 3P BREAKER    | 1             | 297   | 297     | 1.25      | 1.25     | 62         | 77.5     |
| 34      | 1" PVC                  | 20            | 1.14  | 22.8    | 0.064     | 1.28     | 62         | 79.36    |
| 36      | 1" PVC CONN             | 2             | 0.97  | 1.94    | 0.211     | 0.422    | 62         | 26.164   |
| 37      | 1" PVC COUPL            | 2             | 0.97  | 1.94    | 0.211     | 0.422    | 62         | 26.164   |
| 38      | 1" PVC 90               | 2             | 1.94  | 3.88    | 0.229     | 0.458    | 62         | 28.396   |



CHANGE PRICING  
LABOR AND MATERIALS BREAKDOWN FORM

Three Of Three

| Item No | Item Description | Material Cost |      |           | Man Hours |       | Labor Cost |         |
|---------|------------------|---------------|------|-----------|-----------|-------|------------|---------|
|         |                  | Quantity      | Unit | Total     | Unit      | Total | Unit       | Total   |
| 83      |                  |               |      | 0         |           | 0     |            | 0       |
| 84      |                  |               |      | 0         |           | 0     |            | 0       |
| 85      |                  |               |      | 0         |           | 0     |            | 0       |
| 86      |                  |               |      | 0         |           | 0     |            | 0       |
| 87      |                  |               |      | 0         |           | 0     |            | 0       |
| 88      |                  |               |      | 0         |           | 0     |            | 0       |
| 89      |                  |               |      | 0         |           | 0     |            | 0       |
| 90      |                  |               |      | 0         |           | 0     |            | 0       |
| 91      |                  |               |      | 0         |           | 0     |            | 0       |
| 92      |                  |               |      | 0         |           | 0     |            | 0       |
| 93      |                  |               |      | 0         |           | 0     |            | 0       |
| 94      |                  |               |      | 0         |           | 0     |            | 0       |
| 95      |                  |               |      | 0         |           | 0     |            | 0       |
| 96      |                  |               |      | 0         |           | 0     |            | 0       |
| 97      |                  |               |      | 0         |           | 0     |            | 0       |
| 98      |                  |               |      | 0         |           | 0     |            | 0       |
| 99      |                  |               |      | 0         |           | 0     |            | 0       |
| 100     |                  |               |      | 0         |           | 0     |            | 0       |
| 101     |                  |               |      | 0         |           | 0     |            | 0       |
| 102     |                  |               |      | 0         |           | 0     |            | 0       |
| 103     |                  |               |      | 0         |           | 0     |            | 0       |
| 104     |                  |               |      | 0         |           | 0     |            | 0       |
| 105     |                  |               |      | 0         |           | 0     |            | 0       |
| 106     |                  |               |      | 0         |           | 0     |            | 0       |
| 107     |                  |               |      | 0         |           | 0     |            | 0       |
| 108     |                  |               |      | 0         |           | 0     |            | 0       |
|         |                  |               |      | \$ 578.17 |           | -6.41 | \$         | -397.51 |

Material Cost \$ 578.17  
 Sales Tax @ 6% 34.69  
 Material Subtotal \$ 612.86

Labor Cost \$ -397.51  
 Labor Burden @ 0 % 0.00  
 Labor Subtotal \$ -397.51

Labor and Material Subtotal \$ 215.35  
 Overhead & Profit @ 0% 0.00

complete to proposed change)  
 Subtotal 215.35

Bond @ 0% 0.00

Total Cost For This Change 215.35

KENTUCKY DEPARTMENT OF EDUCATION  
DIVISION OF FACILITIES MANAGEMENT

CHANGE ORDER SUPPLEMENTAL  
INFORMATION FORM

702 KAR 4:160

(Supplement to AIA G701 and G701/CMA Change Order Forms)

District: Hardin County District Code: 231 Facility Name: Radcliff Elementary School School Code: \_\_\_\_\_

BG #: 11-074 Project: Radcliff Elementary School Renovation – Phase 3 Contract/Bid Package: \_\_\_\_\_

Original Contract Sum: \$5,088,000.00 Change Order Number: 6

Requested Change Order Amount \$ 231.00 Time Extension Required: ☐ Yes ☒ No

**NOTE: All change orders shall be submitted with complete cost breakdown including materials, labor, overhead and profit, and any other descriptive drawings and information.**

Contract change requested by:

☐ Local Board of Education ☐ General Contractor  
☐ Architect/Engineer ☐ Construction Manager  
☐ Code Enforcement Official ☒ Other: Kitchen equipment manufacturers

Change Order Description and Justification:

Electrical requirements for the food service equipment listed below have changed since construction began. Although this equipment is the same manufacturer as designed, the electrical requirements per the manufacturer changed after start of construction, and electrical revisions are necessary to accommodate the equipment.

1) Booster Heater (Item #10) - Revise breaker from 125/3 to 100/3. Revise wire and conduit size from 3#1/0, 1#6, 2"C to 3#1, 1#8, 1-1/2"C. Revise disconnect switch from 200A to 100A.

2) Combi-Oven (Item #35) - Revise breaker from 70/3 to 50/3. Revise wire and conduit size from 3#4, 1#8, 1-1/2"C to 3#6, 1#10, 1"C.

3) Combi-Oven (Item #35A) - Revise breaker from 125/3 to 80/3. Revise wire and conduit size from 3#1/0, 1#6, 2"C to 3#3, 1#8, 1-1/2"C.

4) Dishwasher (Item #11) - Revise breaker from 70/3 to 90/3. Revise wire size from 3#4, 1#8, 1-1/2"C to 3#2, 1#8, 1-1/2"C.

Cost Benefit to Owner:

Electrical revisions necessary to accommodate food service equipment items specified in the construction documents. These items had electrical requirements that changed per the manufacturer after start of construction.

Have contract unit prices been utilized to support the cost associated with this change order?

☒ Yes ☐ No

Is the cost for this change order supported by an alternate bid or competitive price quote(s)?

☐ Yes ☒ No

Does this change order affect the total Architect/Engineer design fee for this project? ☒ Yes ☐ No

Current A/E Contract Amount: \$290,692.53

Fee Amount for this change +/-: \$ 12.94

New A/E Contract Amount: \$290,705.47

Board of Education Designee Signature \_\_\_\_\_

Date \_\_\_\_\_