

City of Morehead Purchase Agreement (From Master Agreement 605-1500000771) 10/24/2018)

ernational HV 4X2 Cab & Chassis -(including extended warranties listed in the terms &		
ditions section) Vehicle Specifications are to satisfy the needs of City of Morehead Per	\$85,000.00	
al chassis configurations are available to accommodate many different app	olications	
Body Equipment Pricing / Options		
Steel Dump Bed with Electric Tarp and 30 Ton Pintle Hook (See Spec Sheet for Details)	\$20,650.00	
Additional Extended Warranty Options		
	posal 11381-01. In all chassis configurations are available to accommodate many different approached by the second secon	

		Pricing Breakdown	
Chassis Total	Pricep	er chassis. To be paid when the chassis is delivered from the factory.	\$85,000.00
<u>Body</u> <u>Equipment</u> <u>Total</u>	Price per body. To be paid when the unit is completed at the body company.		\$20,650.00
Quantity			1
Grand Total		Terms & Conditions	\$105,650.00
Destination		Chassis only orders are FOB Bluegrass International dealership in George orders that require a body are FOB the body company. Special delivery are negotiated separately if required by the customer.	rangements can be
Payment Tern		The chassis will be paid for at the time the chassis is delivered from the factory. If applicabe the body will be paid for when the unit is completed. Separate payment terms can be negotiated if required by the customer.	
Engine Warran	Engine Warranty Engine Warranty Engine warranty coverage (includes engine, electronics, injectors, & cooling system) w 5 years / 100,000 miles / 3,600 engine hours, whichever comes first.		•
Vehicle / Drive Train Vehicle / Drive Train warranty coverage will be for 3 Years / 100,000 miles, whicheve Warranty		, whichever comes	

Cab (Structural & Corrosion) Warranty	Cab warranty coverage will be for 5 Years / Unlimited miles
Towing Warranty	Towing warranty coverage will be for 1 Year / unlimited miles to the nearest Navistar dealer for Navistar warrantable failures (\$550 maximum benefit per incident).
Aftertreatment System Warranty	Aftertreatment system warranty coverage will be for 5 Years / 100,000 miles, whichever comes first.
Specifications	Customer accepts the attached chassis & other equipment specifications (customer must sign the specifications for all equipment before the order can be placed).

Customer Name (Print):	Sales Representative:
Customer Signature:	Signature:
Customer Title:	Date:
Date:	Phone: (502) 570-5252

INTERNATIONAL® October 24, 2018

Prepared For:


CITY OF MOREHEAD Public Works

Evan White 105 E Main St.

Morehead, KY 40351-1617

(606)784 - 4503 Reference ID: N/A Presented By:
BLUEGRASS INTL TRUCKS
Ryan Brown
101 TRIPORT CIRCLE
GEORGETOWN KY 40324 (502)570-5252

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

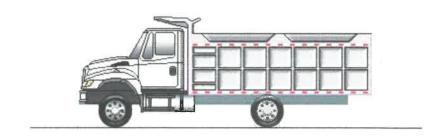

Model Profile 2019 HV607 SBA (HV607)

AXLE CONFIG: 4X2

APPLICATION: Construction Dump

MISSION: Requested GVWR: 37000. Calc. GVWR: 37000

Calc. Start / Grade Ability: 25.76% / 3.09% @ 55 MPH

Calc. Geared Speed: 78.6 MPH

DIMENSION: Wheelbase: 152.00, CA: 84.90, Axle to Frame: 83.00

ENGINE, DIESEL: {Cummins L9 330} EPA 2017, 330HP @ 2000 RPM, 1000 lb-ft Torque @ 1400 RPM, 2200 RPM

Governed Speed, 330 Peak HP (Max)

TRANSMISSION, AUTOMATIC: {Allison 3000 RDS} 5th Generation Controls, Close Ratio, 5-Speed with Overdrive, with PTO

Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off

Highway

CLUTCH: Omit Item (Clutch & Control)

AXLE, FRONT NON-DRIVING: {Dana Spicer E-1462W} Wide Track, I-Beam Type, 14,000-lb Capacity

AXLE, REAR, SINGLE: {Dana Spicer S23-190} Single Reduction, Hypoid Gearing, 23,000-lb Capacity, R Wheel Ends

Gear Ratio: 4.56

CAB: Conventional

TIRE, FRONT: (2) 315/80R22.5 Load Range L HSC1 (CONTINENTAL), 484 rev/mile, 68 MPH, All-Position

TIRE, REAR: (4) 11R22.5 Load Range H HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive

SUSPENSION, RR, SPRING, SINGLE: Vari-Rate; 23,500-lb Capacity, with 4500 lb Auxiliary Rubber Spring

PAINT: Cab schematic 100WL

Location 1: 9219, Winter White (Std)

Chassis schematic N/A

Proposal: 11381-01

Description

Base Chassis, Model HV607 SBA with 152.00 Wheelbase, 84.90 CA, and 83.00 Axle to Frame.

TOW HOOK, FRONT (2) Frame Mounted

AXLE CONFIGURATION (Navistar) 4x2

FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.433" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL

BUMPER, FRONT Full Width, Aerodynamic, Steel; 0.142" Material Thickness

WHEELBASE RANGE 138" (350cm) Through and Including 187" (475cm)

BUMPER EXTENSION, FRONT 2.0"

AXLE, FRONT NON-DRIVING {Dana Spicer E-1462W} Wide Track, I-Beam Type, 14,000-lb Capacity

SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 14,000-lb Capacity, with Shock Absorbers

BRAKE SYSTEM, AIR Dual System for Straight Truck Applications

BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 Sqln Long Stroke Brake Chambers

DRAIN VALVE (Berg) with Pull Chain, for Air Tank

AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)

AIR DRYER (Bendix AD-9) with Heater

BRAKE CHAMBERS, REAR AXLE (Bendix EverSure) 30/30 Spring Brake

BRAKE CHAMBERS, FRONT AXLE (Bendix) 24 Sqln

BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake

AIR COMPRESSOR (Cummins) 18.7 CFM Capacity

AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab

AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Left Rail, Back of Cab, Perpendicular to Rail

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 18" Dia., Black

STEERING GEAR (Sheppard M100) Power

AFTERTREATMENT COVER Aluminum

EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab

ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger

EXHAUST HEIGHT 10'

MUFFLER/TAIL PIPE GUARD (1) Non-Bright Aluminum

TAIL PIPE (1) Straight Type, Non-Bright, for Single Exhaust

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

ALTERNATOR (Delco Remy 36SI) Brushless, 12 Volt 165 Amp. Capacity, Pad Mount, with Remote Voltage Sensor

BODY BUILDER WIRING Back of Standard or Sleeper Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn

2

Description

ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket

BATTERY SYSTEM (Fleetrite) Maintenance-Free, (3) 12-Volt 1980CCA Total

RADIO AM/FM/WB/Clock/3.5MM Auxiliary Input

SPEAKERS (2) 6.5" Dual Cone Mounted in Doors

CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and One (1) Antenna, Antenna Base with Wiring on Left Side Mirror

BACK-UP ALARM Electric, 102 dBA

HORN, ELECTRIC Disc Style

BATTERY BOX Steel with Plastic Cover, 18" Wide, 2, 3, or 4 Battery Capacity, Mounted Left Side Back of Cab

CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade

STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection

INDICATOR, LOW COOLANT LEVEL with Audible Alarm

ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened

CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

SWITCH, AUXILIARY Switch 40 amp Circuit for Customer Use; Includes Wiring Connection at PDC and Control in Cab

TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender

HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord

USB PORT (1) Located in the Instrument Panel

LOGOS EXTERIOR Model Badges, Shipped Loose, Located in Cab

LOGOS EXTERIOR, ENGINE Badges

GRILLE Chrome

FRONT END Tilting, Fiberglass, with Three Piece Construction, Sloped Front

PAINT SCHEMATIC, PT-1 Single Color, Design 100

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

SAFETY TRIANGLES

CLUTCH Omit Item (Clutch & Control)

ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection

BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines

ENGINE, DIESEL {Cummins L9 330} EPA 2017, 330HP @ 2000 RPM, 1000 lb-ft Torque @ 1400 RPM, 2200 RPM Governed Speed, 330 Peak HP (Max)

3

FAN DRIVE (Horton Drivemaster) Direct Drive Type, Two Speed with Residual Torque Device for Disengaged Fan Speed

RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 1045 Sqln Louvered, with 373 Sqln CAC, with In Tank Oil Cooler

AIR CLEANER with Service Protection Element

FEDERAL EMISSIONS (Cummins L9) EPA, OBD and GHG Certified for Calendar Year 2018

Description

THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

EMISSION COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations

ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout; with Ignition Switch Control for Cummins B6.7 and L9 Engines

TRANSMISSION, AUTOMATIC {Allison 3000 RDS} 5th Generation Controls, Close Ratio, 5-Speed with Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway

TRANSMISSION SHIFT CONTROL for Column Mounted Stalk Shifter

TRANSMISSION OIL Synthetic; 29 thru 42 Pints

ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction

SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming

PTO LOCATION Right Side of Transmission

AXLE, REAR, SINGLE {Dana Spicer S23-190} Single Reduction, Hypoid Gearing, 23,000-lb Capacity, R Wheel Ends . Gear Ratio: 4.56

SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 23,500-lb Capacity, with 4500 lb Auxiliary Rubber Spring

FUEL/WATER SEPARATOR {Racor 400 Series,} with Primer Pump, Includes Water-in-Fuel Sensor

LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail, 8" Back of Cab

FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 40 US Gal (151L), with Quick Connect Outlet, Mounted Left Side, Under Cab

DEF TANK 7 U.S. Gal. 26.5L Capacity, Frame Mounted Outside Left Rail, Under Cab

CAB Conventional

AIR CONDITIONER with Integral Heater & Defroster

GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display

IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Cloth, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjust

SEAT, PASSENGER (National) Non Suspension, High Back, Fixed Back, Integral Headrest, Cloth

MIRRORS (2) Power Adjust, Thermostatically Controlled Heated Heads, Black Heads, Brackets and Arms, 7.55" x 14.1" Flat Glass, 7.48" x 6.77" Convex Glass Both Sides

CAB INTERIOR TRIM Classic, for Day Cab

CAB REAR SUSPENSION Air Bag Type

WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors

INSTRUMENT PANEL Flat Panel

ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps Per Door, for use with Regular and Extended Cabs

WHEELS, FRONT (Accuride 29039) DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc

WHEELS, REAR (Maxion 10049) DUAL DISC; 22.5x8.25 Rims, Painted Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .490" Thick Increased Capacity Disc and Steel Hubs

PAINT IDENTITY, REAR WHEELS Disc Rear Wheels; with Vendor Applied White Powder Coat Paint

INTERNATIONAL®

Vehicle Specifications 2019 HV607 SBA (HV607)

October 24, 2018

Description

- (4) TIRE, REAR 11R22.5 Load Range H HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
- (2) TIRE, FRONT 315/80R22.5 Load Range L HSC1 (CONTINENTAL), 484 rev/mile, 68 MPH, All-Position

Services Section:

WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

```
Ultimote
➡ DowNikoadhessagelide email 5 Reply ∨ 🗓 Delete 🗇 Archive 🛇 Junk ∨ 🎸 Sweep
                         **** PRICE QUOTE ****
                                                           PAGE: 1
     Favorites
  Inbox 19
TEBCO OF KENTUCKY, INC.
                                        ORDER NUMBER:
 100 WHITE HALL SHRINE ROAD
                                        ORDER DATE: 10/23/18
  RICHMOND, KY. 40475
   (800) .284-2014
                                         REF. NO.:
 (859)chiye -8509-FAX
   (859) 624-0653
                                         SALESPERSON: WL
    Add favorite
                                         CUSTOMER NO: 00-B459
                                     SHIP TO:
  SOLD TO:
 ✓BLUECKISS INTERNATIONAL
                                     BLUEGRASS INTERNATIONAL
  101 TRIPORT CIRCLE
                                    101 TRIPORT CIRCLE
Georgetown 19 KY 40324
                                   Georgetown
                                                  KY 40324
  CONFIRM_TO:
                              END USER:
UNIT ORDERED PRICE AMOUNT
ITEM NO. DESCRIPTION
-Scheduled
TG10.01 10' TG 7 GA HI x 10 GA AEACHO 1.00
     Deleted Items_190TG Series Dump Body (Serial # = W.O. #)
            on Truck Model ??????/Serial # ??????
            WB: ????/CT: ????/CC: ????/PIVOT: ????/OH: ????
Archive
            CAB HT: ?????/BH HT: ?????/TRUCK COLOR: ?????
            per the following specifications:
     air line tickets en. D I M E N S I O N S *****
            LENGTH: 10'
     ConversationDHis:.. 96" OD/86" ID
            SIDE HEIGHT*:36"
     New folde*****LONGSILLS*****
            MATERIAL: 5" channel
            *****CROSSMEMBERS****
     Upgrade to Office CENTERS: 12" centers
     365 with premium ACED*: No
     Outlook features*DECK/FLOOR****
            MATERIAL: 3/16" HT.
            SHEDDER PLATES*: None
 ***** SIDEWALLS *****
            SIDE HEIGHT*: See Dimensions Above
            SIDE MATERIAL: 1/8" AR 200
            FRONT POSTS: Yes
            SIDE POSTS: formed vertical posts
```

TOD DATER. AULAU ALLEGAAL .../ Land allegaal

There is no need to bid out your equipment...

Per <u>Master Agreement 605-1500000771</u>, any state agency and their political subdivisions can purchase equipment from Bluegrass International without the hassle of going out for bid (see exert directly from the contract below). This section in the contract was put in place by the Commonwealth of KY to make it easy for state agencies to purchase equipment without spending time and money going through the bid process.

2.04—Divisions/Agencies to Be Served

This contract shall be for use by the following Divisions/Agencies of the Kentucky Transportation Cabinet:

All State Agencies and their political subdivisions

This Invitation designates specific Contractual responsibilities to Transportation Cabinet offices and personnel. If Contracts resulting from this Invitation are used by political subdivisions and state agencies other than the Transportation Cabinet, such responsibilities will be assumed by the user agency. All billing and payments for materials purchased from an agreement(s) resulting from this Invitation will be directly between the user agencies and Vendors.

EXEMPTION CERTIFICATE

(Retail Truck, Tractor, Truck Body, and/or Trailer)

ie) of that I
se side
thru
to on.