

HVAC SHEET NOTES:

- 1) PROVIDE NEW AC-2 IN LOCATION OF UNIT THAT WAS REMOVED.
- 2) PROVIDE NEW AC-1 IN LOCATION AS INDICATED. THIS MAY BE SLIGHTLY DIFFERENT TO ALLOW CODE ACCESS TO ONE SIDE. PROVIDE NEW 4" CONCRETE PAD FOR UNIT.
- 3) PROVIDE ALL NEW DUCT CONNECTIONS AND TRANSITIONS FROM EXISTING DUCT TO NEW DUCT.
- 4) REFER TO NEW MECHANICAL ROOM PIPING PLAN THIS SHEET FOR NEW PIPING.

PIPING SHEET NOTES:

- 1) PROVIDE NEW BOILER PER PIPING PLAN. INSTALL ON 4" HIGH CONCRETE PAD.
- 2) PROVIDE COPPER CONDENSATE DRAIN LINE TO FLOOR DRAIN. PROVIDE 3/4" FOR AC-1 AND 1" FOR AC-2.
- 3) PROVIDE NEW FRESH AIR VENT.
- 4) PROVIDE AL-29 S.S. FLUE VENT.

SCHEMATIC DESIGN

CONSTRUCTION DOCUMENTS		
NO	ISSUE	DATE


Sheet Information

BG Number	???????
Project Number	1822
Drawn	-
Checked	-
Approved	-
Title	

HVAC GROUND FLOOR PLAN


Sheet

M101

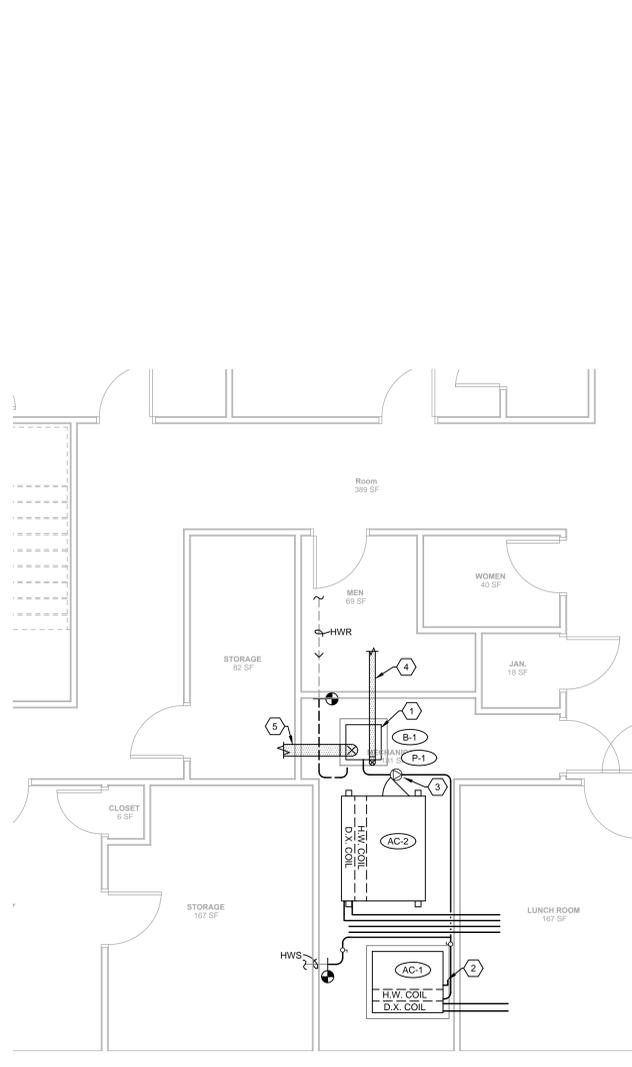

**MECHANICAL PIPING
 GROUND FLOOR PLAN - NEW WORK**

SCALE: 1/4" = 1'-0"

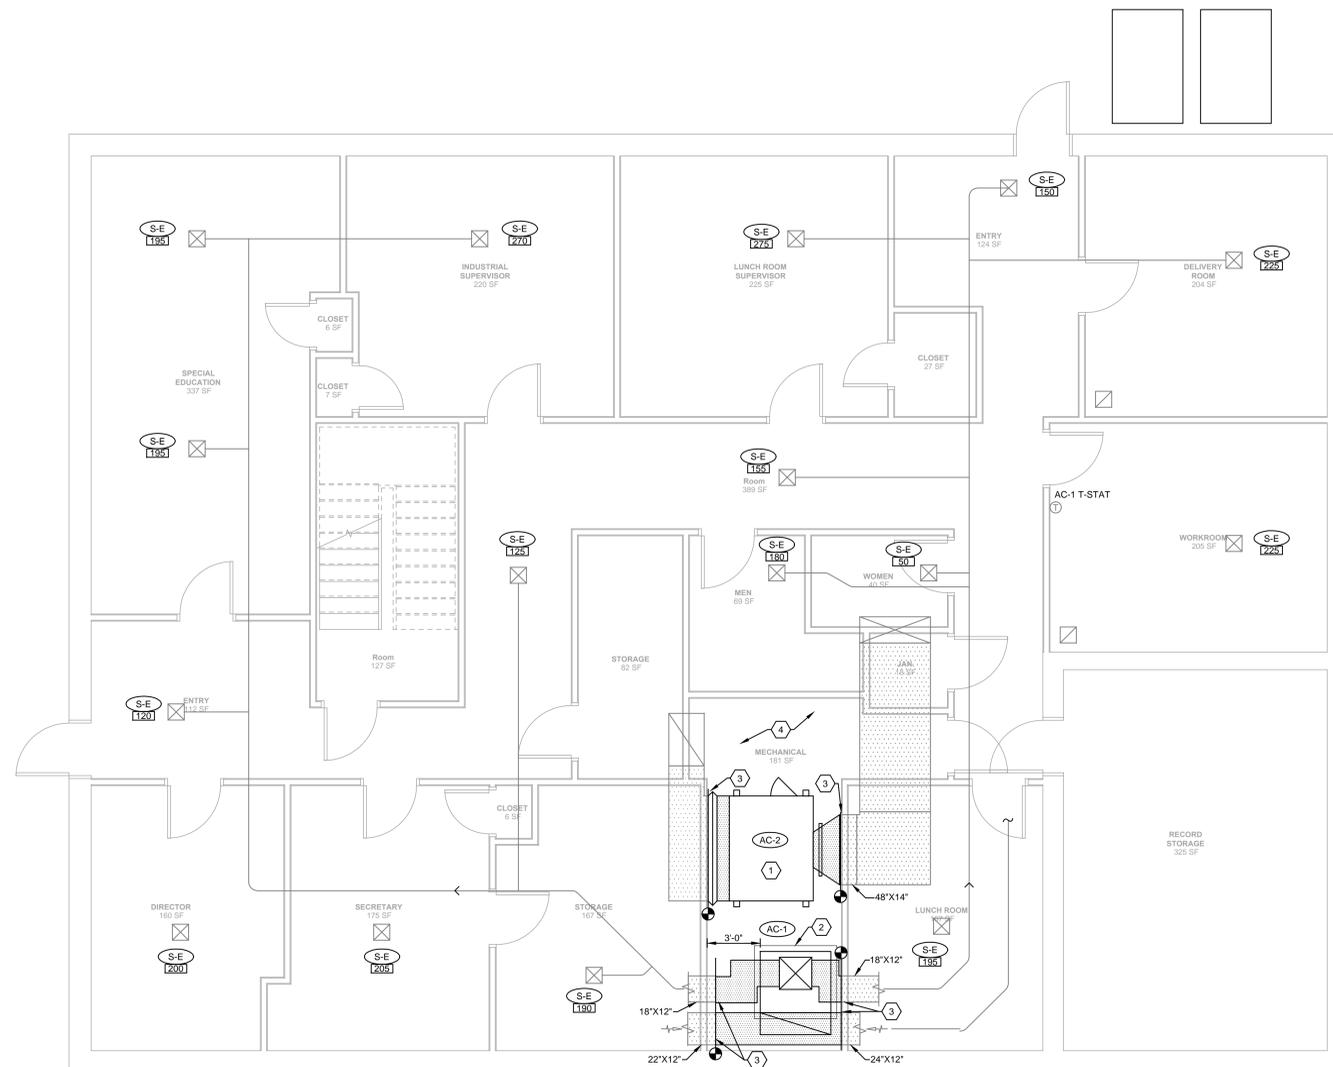

HVAC GROUND FLOOR PLAN - NEW WORK

SCALE: 1/4" = 1'-0"