

DANNY CLEMENS, DIRECTOR
GEORGE BROCK, MAINTENANCE SUPERVISOR
THOMAS STOKES, CUSTODIAL SUPERVISOR
ANDREA ROCK, ENERGY MANAGER

DEPARTMENT OF FACILITIES

MEMO

TO: Dr. Jesse Bacon, Superintendent *JB*
FROM: Danny Clemens, Director of Facilities
Date: September 15, 2023
RE: Pleasant Grove Elementary Road Addition **DC**


Pleasant Grove Elementary School has requested a 12ft wide road that will connect Wava Drive to their school parking lot. Currently traffic is very congested entering and exiting the school through Bogard Ln. This addition will help improve the traffic pattern of their car rider line. This project will be paid through Maintenance Department funds.

I recommend approval of this request.

Wood

OUR MISSION IS TO INSPIRE AND EQUIP OUR STUDENTS TO SUCCEED IN LIFE

BULLITT COUNTY PUBLIC SCHOOLS IS AN EQUAL EDUCATION AND EMPLOYMENT INSTITUTION

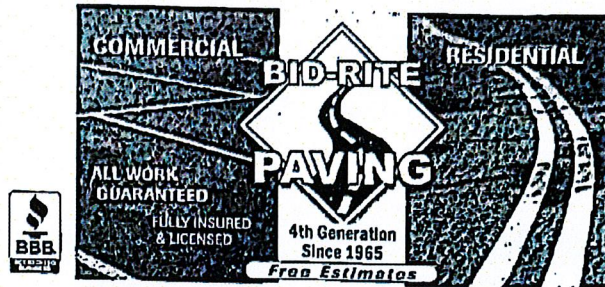

Louisville 502-899-2086 • E-town 270-737-0007 • Shep. 502-543-1441 • So. Ind. 812-280-1010 • Corydon 812-738-8888

Date 9-13-23

INVOICE AND CONTRACT AGREEMENT

Guaranteed 1 year No Guarantee

In Account with

Phone # _____
Terms: _____ Completion Date: _____

The undersigned agrees to furnish all materials and labor necessary for the work on the premises located at:
Street# 10920 S. Preston Hwy. City Lebanon Jct. State Ky

The undersigned property owners agree upon completion of work to pay the sum of \$ 8,575
Payment to be made in full- DEPOSIT _____ BALANCE _____

(Any cancellation 30% of cost charged)

We are not responsible for anything underground. Guarantee does not include the following: cracks, acts of nature beyond our control, power steering marks, scuff marks, vegetation growth. Any damage due to heavy equipment is not guaranteed. This guarantee is null and void if driveway is sealed by any other company than Bid-Rite Paving. Initials:

Job: _____

Paving new roadway 12ft wide from top existing asphalt to lower parking lot, removing grass and installing DGA stone and Base and Surface asphalt

RESURFACING

- Resurface to prepare old asphalt for paving, remove vegetation from edges, spray with grass and weed killer.
- Repair broken areas and wedge low spots as needed.
- Lay approximately 1.5 of hot mix asphalt.
- Tamp edges at a 45 degree angle for proper finish.

FOR GRAVEL AREA

- Remove vegetation from edges to prepare for paving.
- Grade existing gravel and add stone as needed and roll base for compaction.
- Spray with grass & weed killer.
- Lay approximately 2 inches of hot mix black top and roll for compaction.
- Tamp edges at a 45 degree angle for proper finish.

SEAL COATING

- Entire asphalt area to be cleaned.
- High pressure seal coat.

PATCH & REPAIR

- Cleaning loose debris and patching _____ areas.

NEW AND WIDENED AREAS

- Remove dirt or grass approximately 6" to 8" deep.
- Lay approximately _____ to _____ crushed stone.
- Spray with grass & weed killer.
- Lay approximately _____ of hot mix black top and roll for compaction.
- Tamp edges at a 45 degree angle for proper finish.

FOR REMOVAL AND REPLACEMENT

- Remove old blacktop or concrete.
- Check base to verify _____ to _____ of stone base and add stone if needed.
- Grade for proper drainage and roll base for compaction.
- Spray with grass & weed killer.
- Lay approximately _____ of hot mix black top and roll for compaction.
- Tamp edges at a 45 degree angle for proper finish.

STRIPING

- Prep area to be painted.

Contractor _____ Purchaser

Date _____ Date _____

Thank you for your business!