


Project Name: Innovation Lab

Location: 202-203; 204

1. Move south wall cabinets in 203 to south wall of classroom 204. Patch behind original location of all wall cabinets.
 2. Remove north wall upper cabinets in 202 – possibly mount along west wall (against hall) if windows are not installed. Includes installing a nailer behind cabinets if needed.
 3. Remove countertop from base cabinets on north wall in 202. *Possibly install new countertops contingent upon cabinet contractors.
 4. Remove all white wall cabinets across north wall in 204.
 5. Remove electrical from area of pocket doors, cut opening in wall for pocket doors.
 6. Build false wall in 204 for pocket door with opening for doors.
 7. Install door, finish walls where cabinets were removed.
 8. Fill in gaps left from removal of partition wall between rooms 202/203 – two walls & ceiling
- Patch flooring where cabinets were removed.

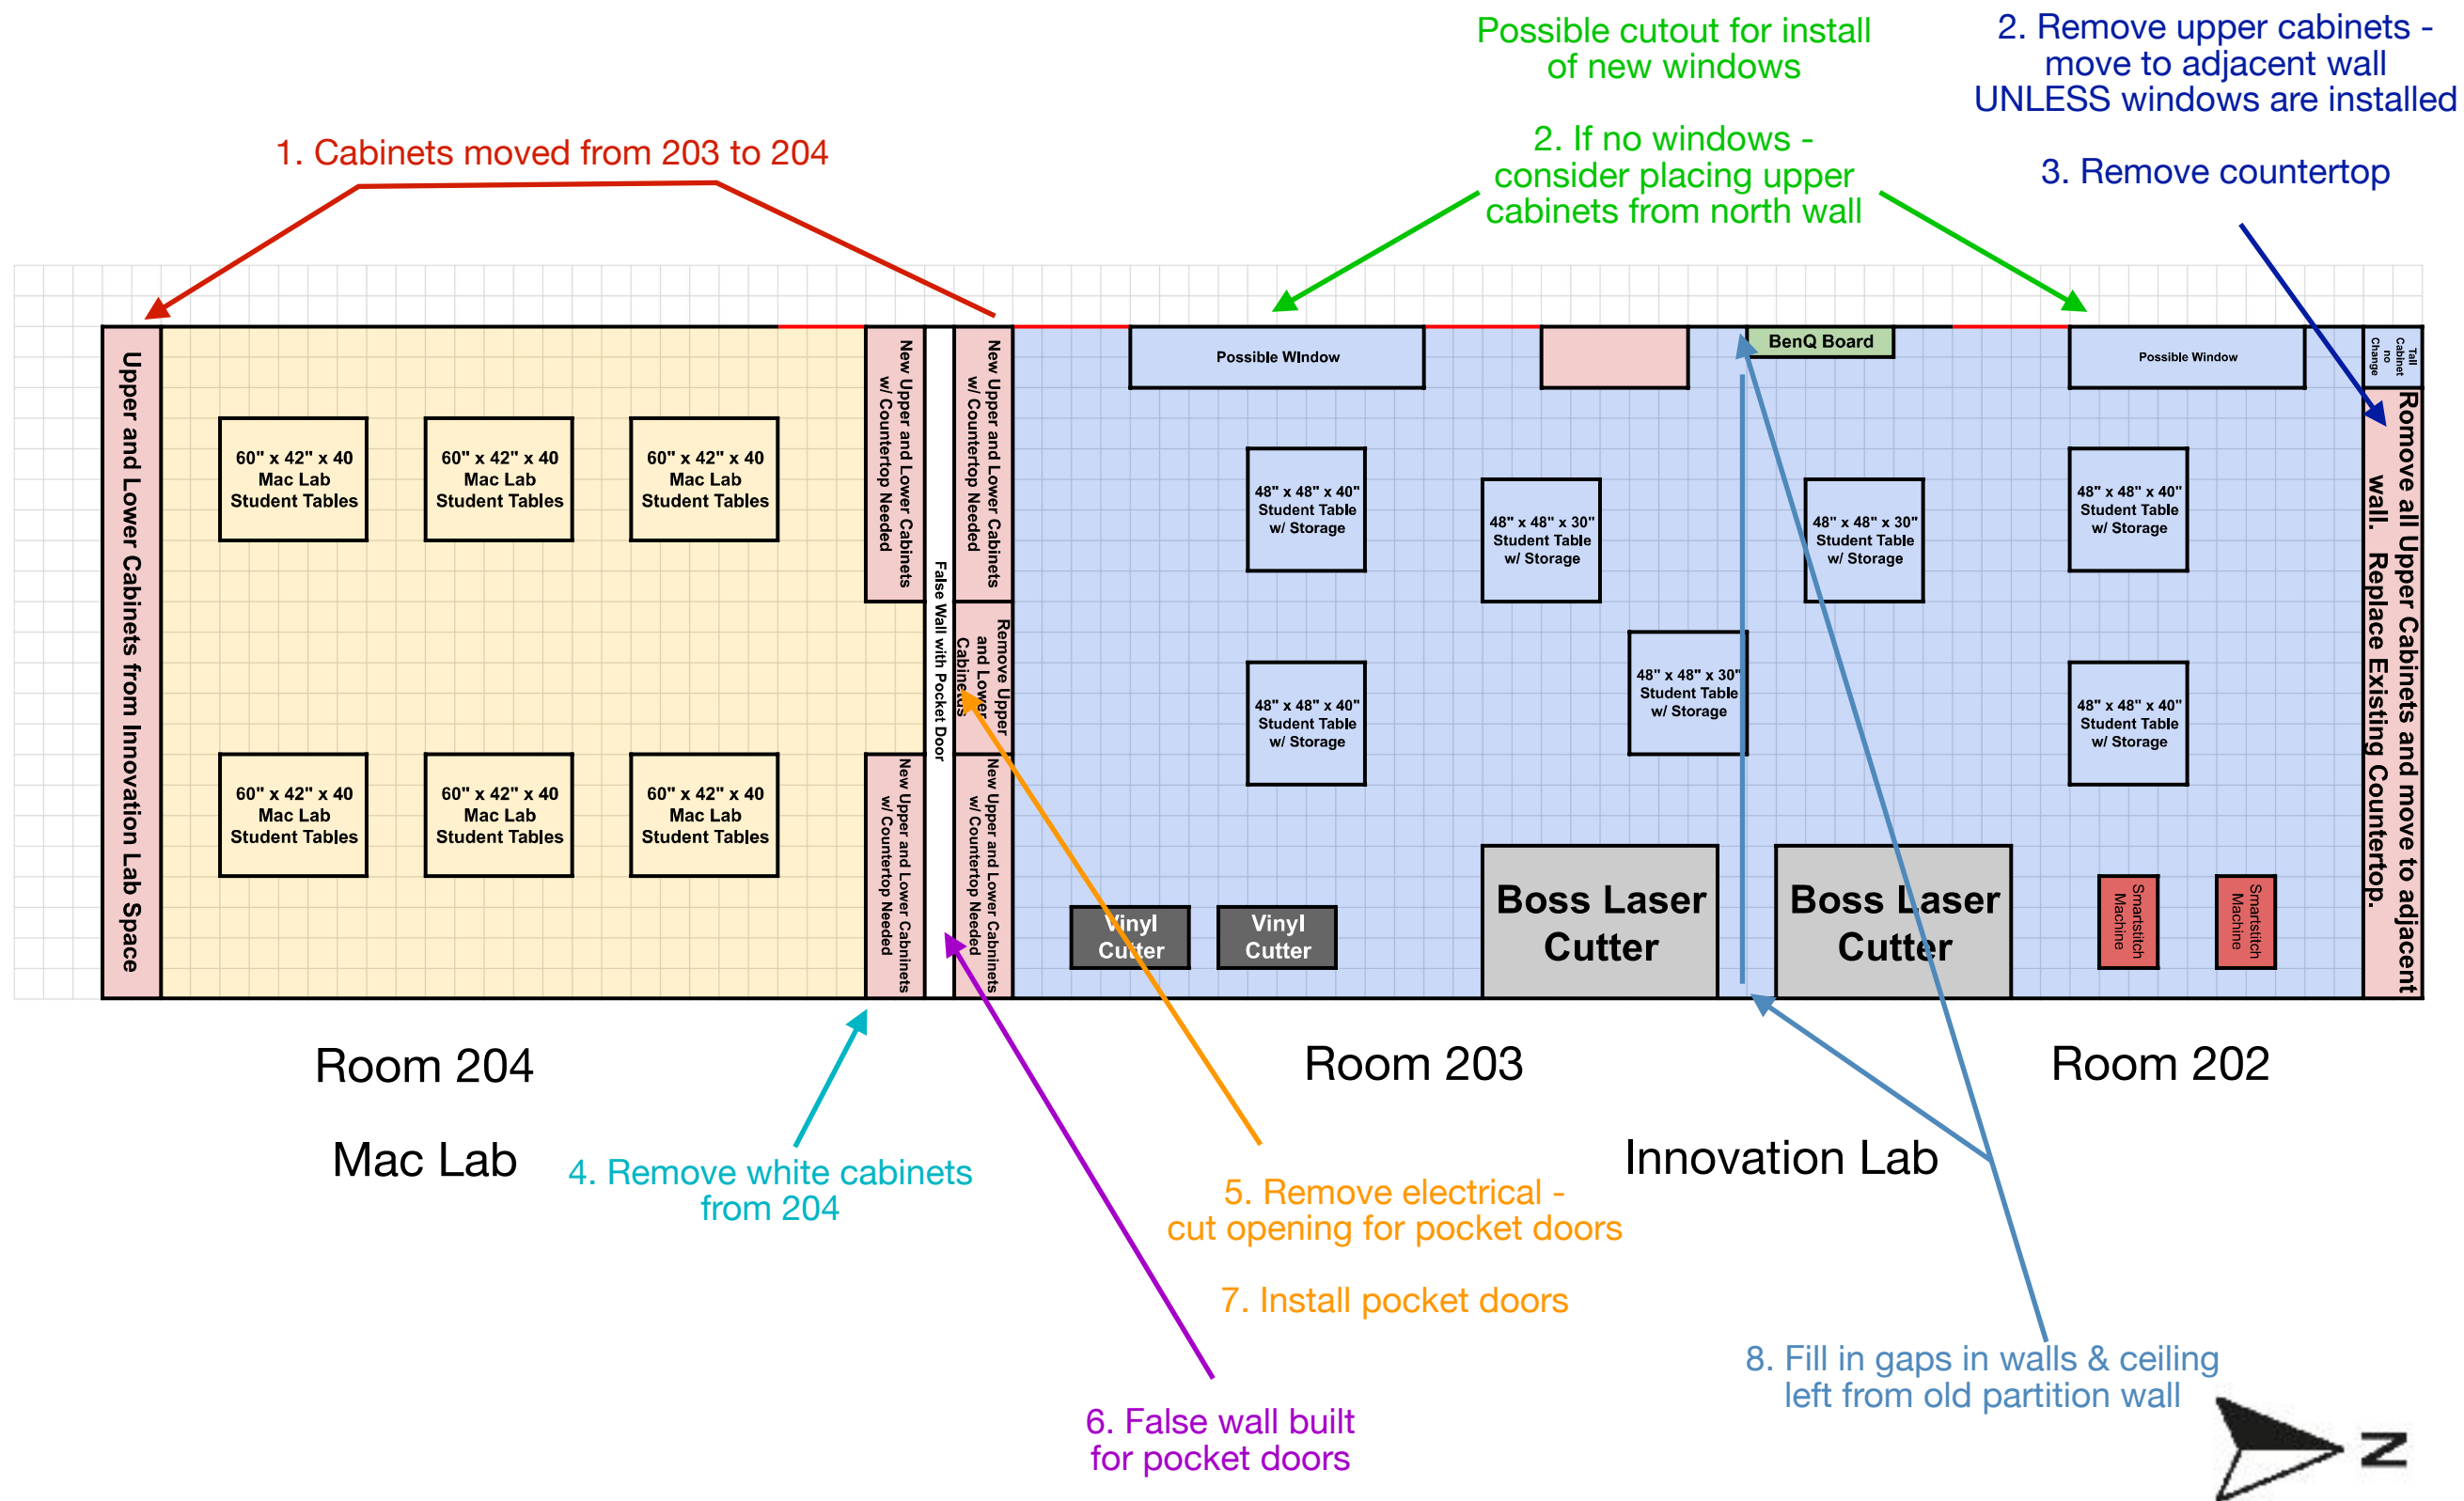

1. Cabinets moved from 203 to 204




2. Remove upper cabinets - move to adjacent wall
UNLESS windows are installed


3. Remove countertop



Possible cutout for install of new windows
2. If no windows - consider placing upper cabinets from north wall

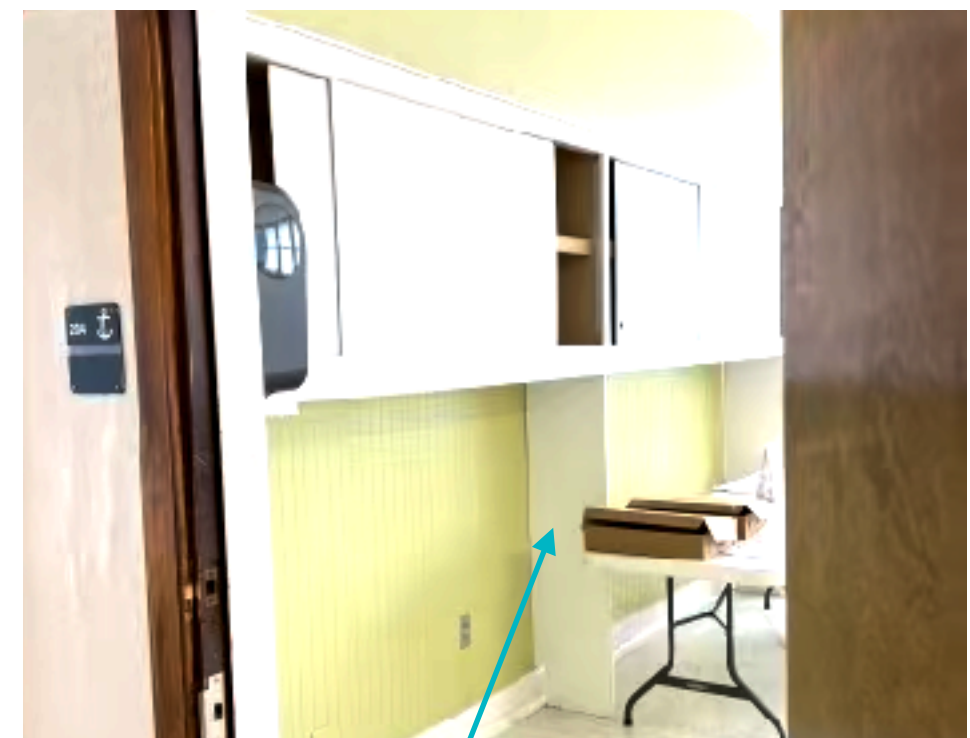

4. Remove white cabinets
from 204

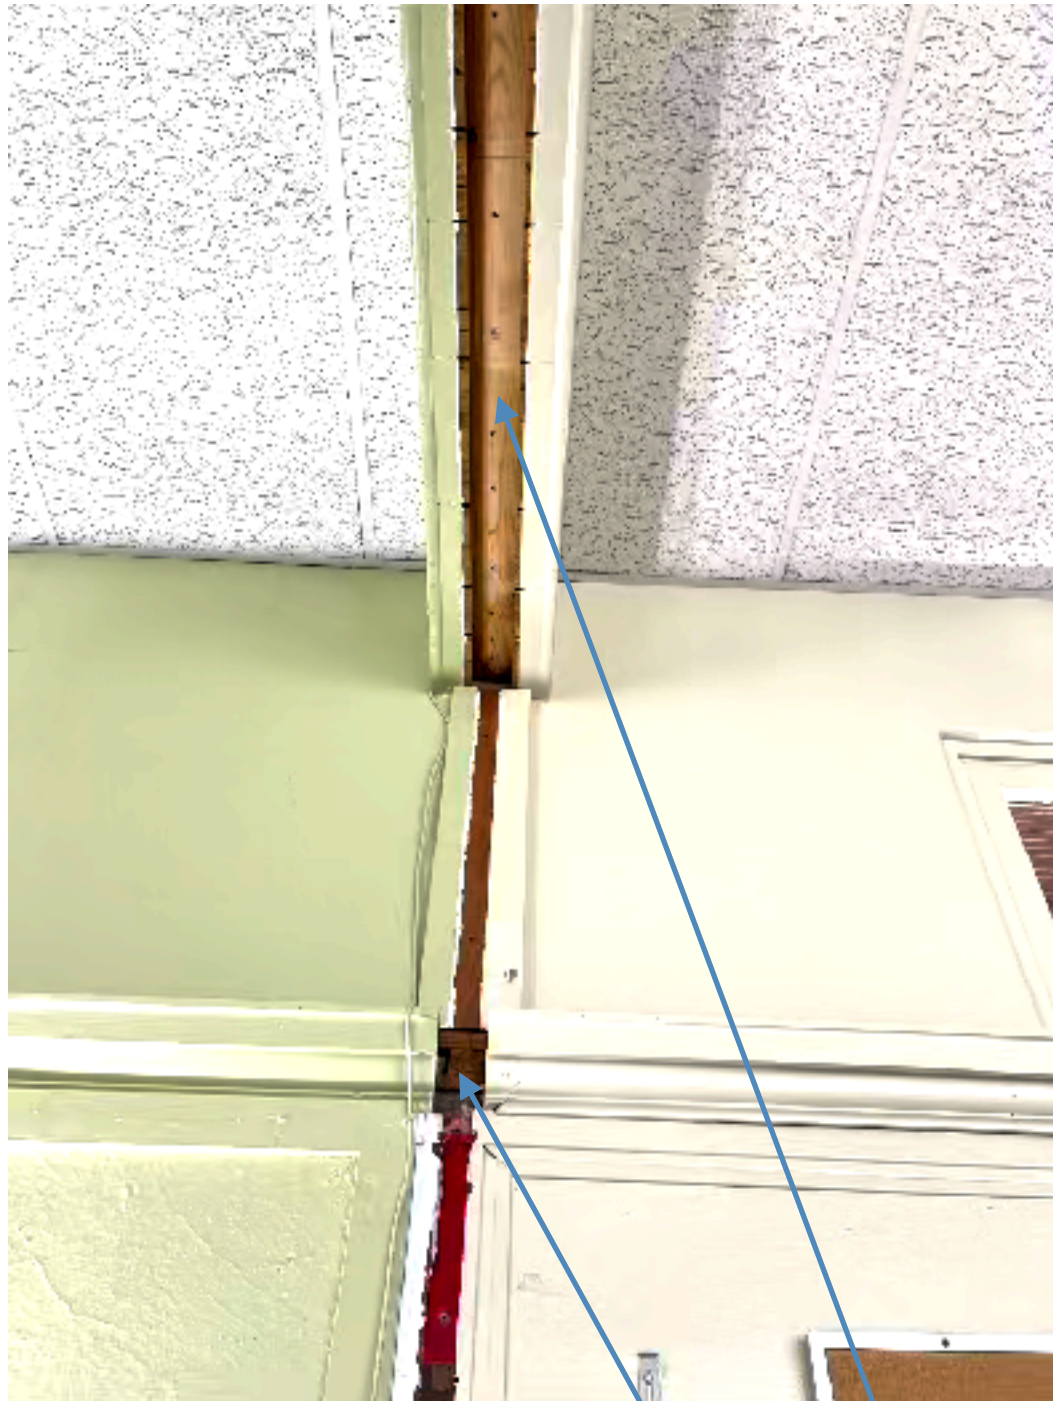

8. Fill in gaps in walls & ceiling left from old partition wall