
Project Name: Innovation Lab


Location: 202-203; 204

- 1. Move south wall cabinets in 203 to south wall of classroom 204. Patch behind original location of all wall cabinets.
- 2. Remove north wall upper cabinets in 202 possibly mount along west wall (against hall) if windows are not installed. Includes installing a nailer behind cabinets if needed.
- 3. Remove countertop from base cabinets on north wall in 202. *Possibly install new countertops contingent upon cabinet contractors.
- 4. Remove all white wall cabinets across north wall in 204.
- 5. Remove electrical from area of pocket doors, cut opening in wall for pocket doors.
- 6. Build false wall in 204 for pocket door with opening for doors.
- 7. Install door, finish walls where cabinets were removed.
- 8. Fill in gaps left from removal of partition wall between rooms 202/203 two walls & ceiling

Patch flooring where cabinets were removed.

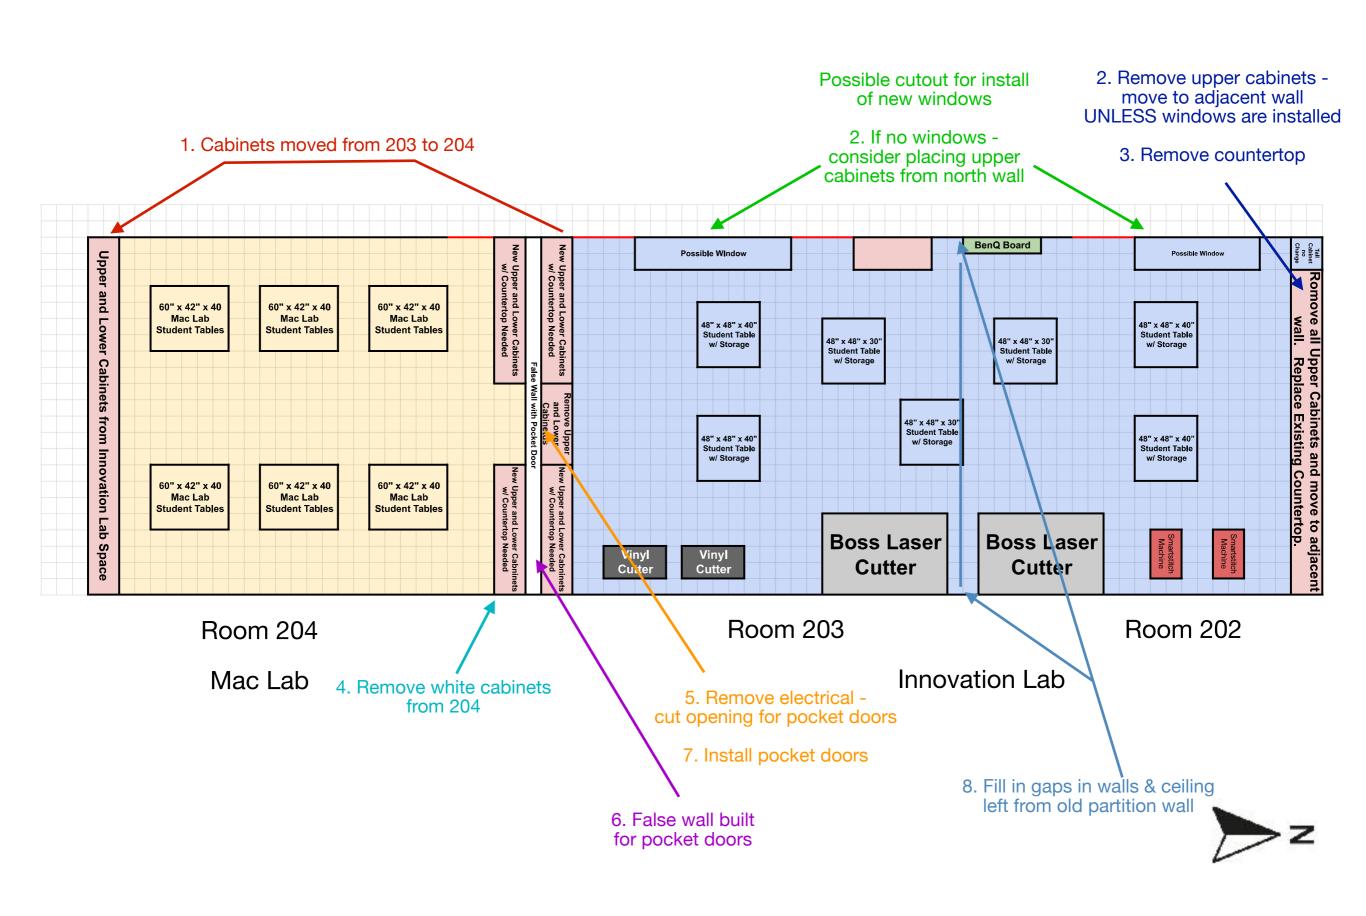


1. Cabinets moved from 203 to 204

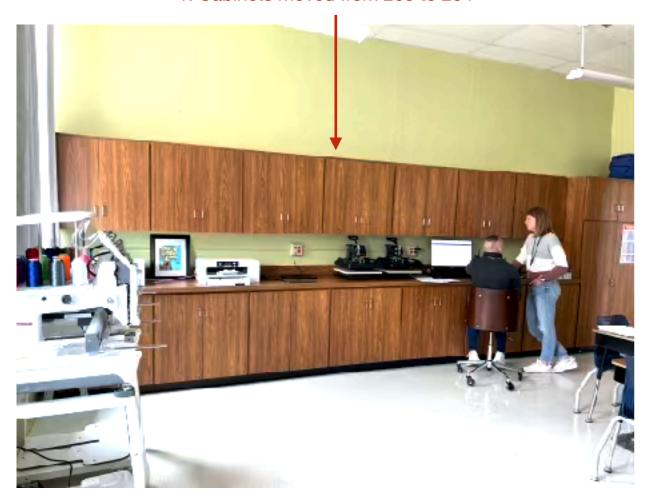


- 2. Remove upper cabinets move to adjacent wall UNLESS windows are installed
 - 3. Remove countertop









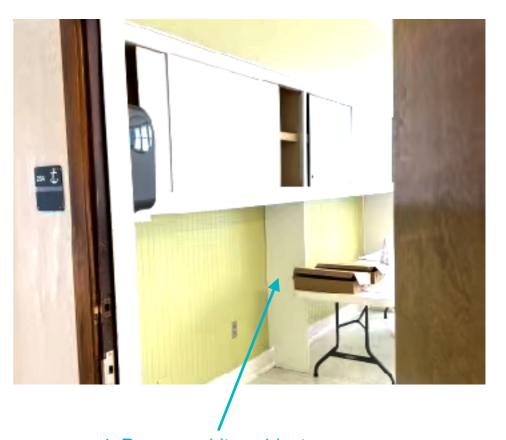

4. Remove white cabinets from 204

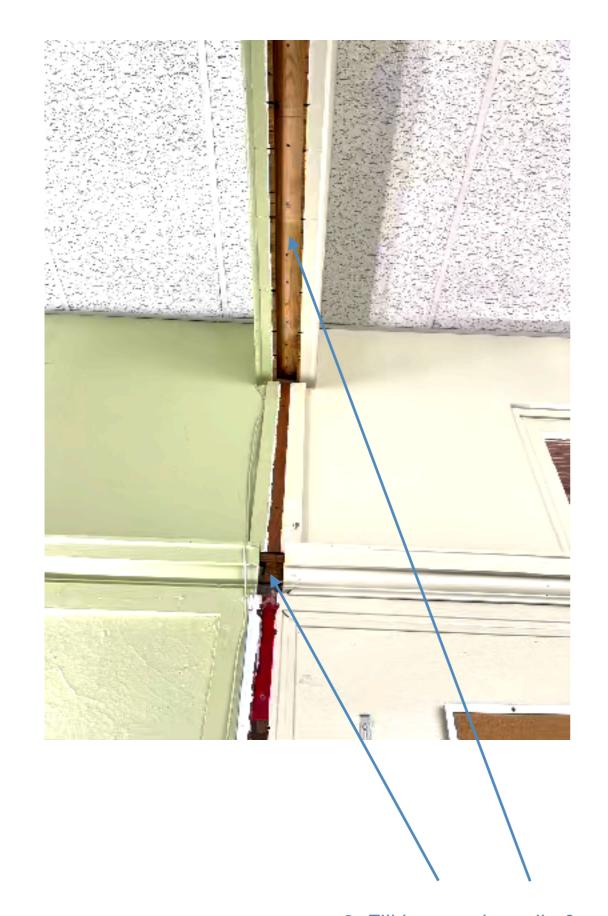

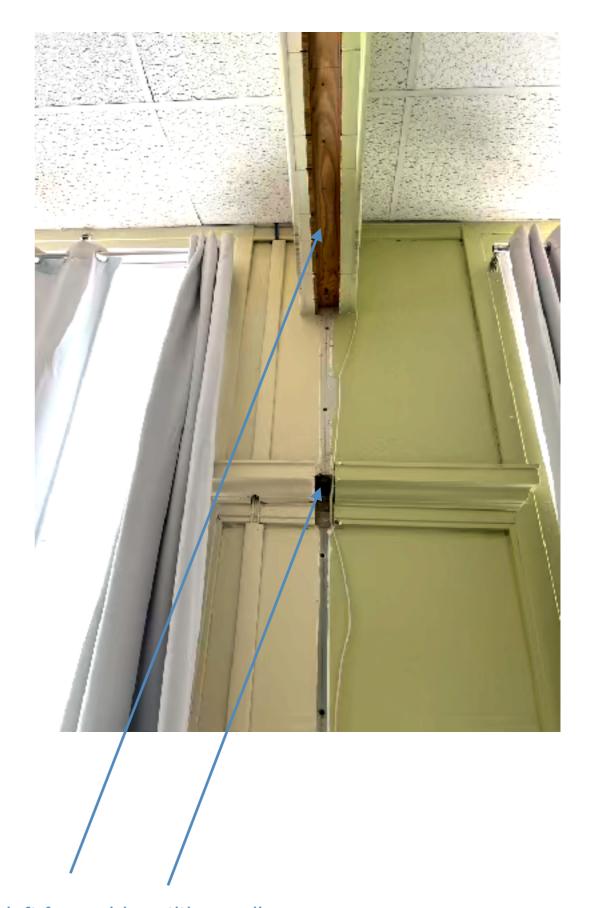

8. Fill in gaps in walls & ceiling left from old partition wall