

tempered safety glass, 5400 Series Wiremold dual-channel electrical raceway, SATCO LED light fixtures, high-pressure laminate faced counter and a fire extinguisher. Estimated weight: 8,000 lbs.

Press Box Understructure for 36" Elev. 10 Row Bleacher - PB-0818Q_10R36GRT:

- Steel I-Beam Construction
- (1) Entry Platform
- (1) Access Stair to Bleacher

Delivered and Installed.

Excludes:

Bonds
Permits
Sales & Use Tax
Groundwork

All installation services are to be provided by Fisher Installations, LLC, Tennessee Contractors License ID Number #80414.

Installation Cost - \$81,430.27 – Separate purchase order required to Fisher Installations, LLC DBA Bleachers and Seats.

All installation service pricing is contingent on the purchase of the materials from Fisher Products, LLC.

Materials Cost - \$346,186.06 – Separate purchase order required to Fisher Products, LLC.

This pricing is valid for 30 days.

50% deposit will be due at time of order. Remainder due at project completion.

*For estimates excluding taxes, the Customer is still responsible for all applicable taxes. Valid tax-exempt documentation must be provided prior to invoicing. If exemption documentation is not provided or is later deemed invalid, taxes will be added to the invoice at the Customer's expense. The Customer agrees to reimburse Fisher Installations, LLC for any taxes, penalties, or interest assessed related to this Agreement

**Economical mill finish foot plank and risers have been specified on this quote. Manufacturer will not be responsible for discoloration or staining (dark black, brown, or white residue) resulting from unavoidable condensation that occurs during packing, transporting and storage, preceding and/or during installation.* Removal of these stains or replacement of boards upon completion of installation is not part of this contract

Bleachers and Seats
615-419-8246
2515 Eugenia Avenue, Ste 101
Nashville, TN 37214

July 9, 2026

Project: King Middle School – Football Bleachers
Harrodsburg, KY

Estimate Number: KY522033

Scope of Work: Aluminum Bleacher Installation

9 row x 156'-6" bleacher
Net seating capacity 788 + 8 ADA seats per unit

Features Include:

Aluminum angle understructure with 8" Rise / 24" Run

36 inch elevation

63 inch clear front walkway

2 x 10 anodized aluminum seat plank with poly end caps

Double 2 x 10 mill finish aluminum foot plank with aluminum end caps

1 x 6 riser rows 1 - 9 and (2) 1 x 6 top row risers (mill finish)

(4) 4'-6" wide vertical aisle with mid aisle handrail

Chain link guardrail system

(2) U-Shaped ADA accessibility ramp + 9 Wheel chair spaces Concrete
wedge anchors


Galvanized hardware

Drawing 36A-1015606CL09_PB818 SALES 4058

Submittals Required

8' x 18' Press Box - PB-MFE_0818_GRT:

8ft x 18ft, MFE Type #1, wood-framed prefab modular press box. The press box will ship to the site on a one-way disposable carrier. The layout is wide-open with a Special-Lite #SL-17 FRP (Fiberglass Reinforced Plastic) insulated entry door with aluminum frame (colors from manufacturer's standards) and an illuminated exit sign at one end. The exterior door is equipped with a commercial lever handled lockset. Other features include 5/8" vinyl-faced gypsum interior wall panels, 5/8" fire-rated gypsum interior ceiling panels taped and bedded with spray-textured finish, house wrap air infiltration barrier, Mastic .048 ribbed vertical board and batten exterior vinyl siding panels, Lindsay #830 "Pinnacle Series" double horizontal slider windows with extruded vinyl frames and 3/4" Low-E, argon filled insulated /

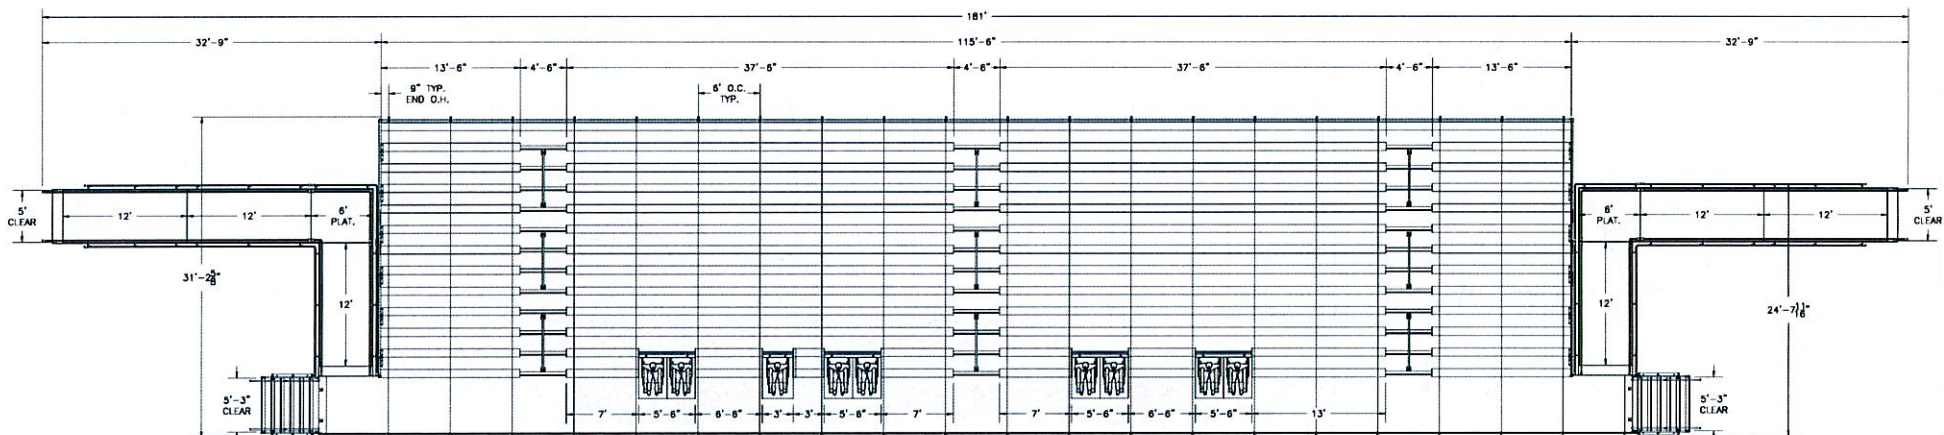

SECTION LENGTH	GROSS SEATS	ACTUAL SEATS	NO. OF ROWS	NET SEATS
115.5	77.00	77.00	1	77
13.5	9.00	9.00	12	108
37.5	25.00	25.00	10	250
7	4.67	4.00	2	8
6.5	4.33	4.00	2	8
3	2.00	2.00	2	4
7	4.67	4.00	2	8
37.5	25.00	25.00	10	250
7	4.67	4.00	2	8
6.5	4.33	4.00	2	8
13	8.67	8.00	2	16
13.5	9.00	9.00	12	108
NET SEATS				853
WHEELCHAIR SPACES				9
TOTAL NET SEATING CAPACITY				862
(BASED ON 18" PER SEAT)				

GENERAL REQUIREMENTS:

- THE INSTALLATION OF THE ANGLE FRAME BLEACHER, SHOWN ABOVE, IS DESIGNED TO BE INSTALLED OUTDOORS.
- INSTALLATION IS TO BE ON A FLAT LEVEL SURFACE WITH EITHER OF THE FOLLOWING CONDITIONS:
 - CONCRETE PAD WITH A MINIMUM COMPRESSION STRENGTH OF 3000 PSI.
 - SOIL WITH A MINIMUM SOIL BEARING OF 2000 PSI.
- REQUIRED SITE WORK TO MEET THE ABOVE NOTED REQUIREMENTS, IS THE SOLE RESPONSIBILITY OF THE OWNER AND TO BE COMPLETED BEFORE MATERIALS SHIP.
- OWNER TO LOCATE AND PROTECT UNDERGROUND CONDUIT, PLUMBING, AND/OR OTHER UTILITIES WHERE NEW WORK WILL BE PERFORMED.



PH: 888-568-9064 FAX: 260-482-7449 WWW.BLEACHERS.NET


This drawing and all information contained herein is the property of NATIONAL RECREATION SYSTEMS, INC. and is not to be reproduced without the express written permission of this manufacturer. We assume no responsibility for unauthorized use of this drawing. NATIONAL RECREATION SYSTEMS, INC. is not responsible for local permits and occupancy requirements.

PROJECT/SITE: 36A-1311506CL09_01 SALES

DESCRIPTION: 36" ELEV. 13 ROW x 115'-6" SEATING PLAN

DRAWN BY: JCM DATE: 3/15/24 REVISION: 0 SCALE: N.T.S. SHEET NUMBER: TD.1

TYP. SEATING SECTION VIEW

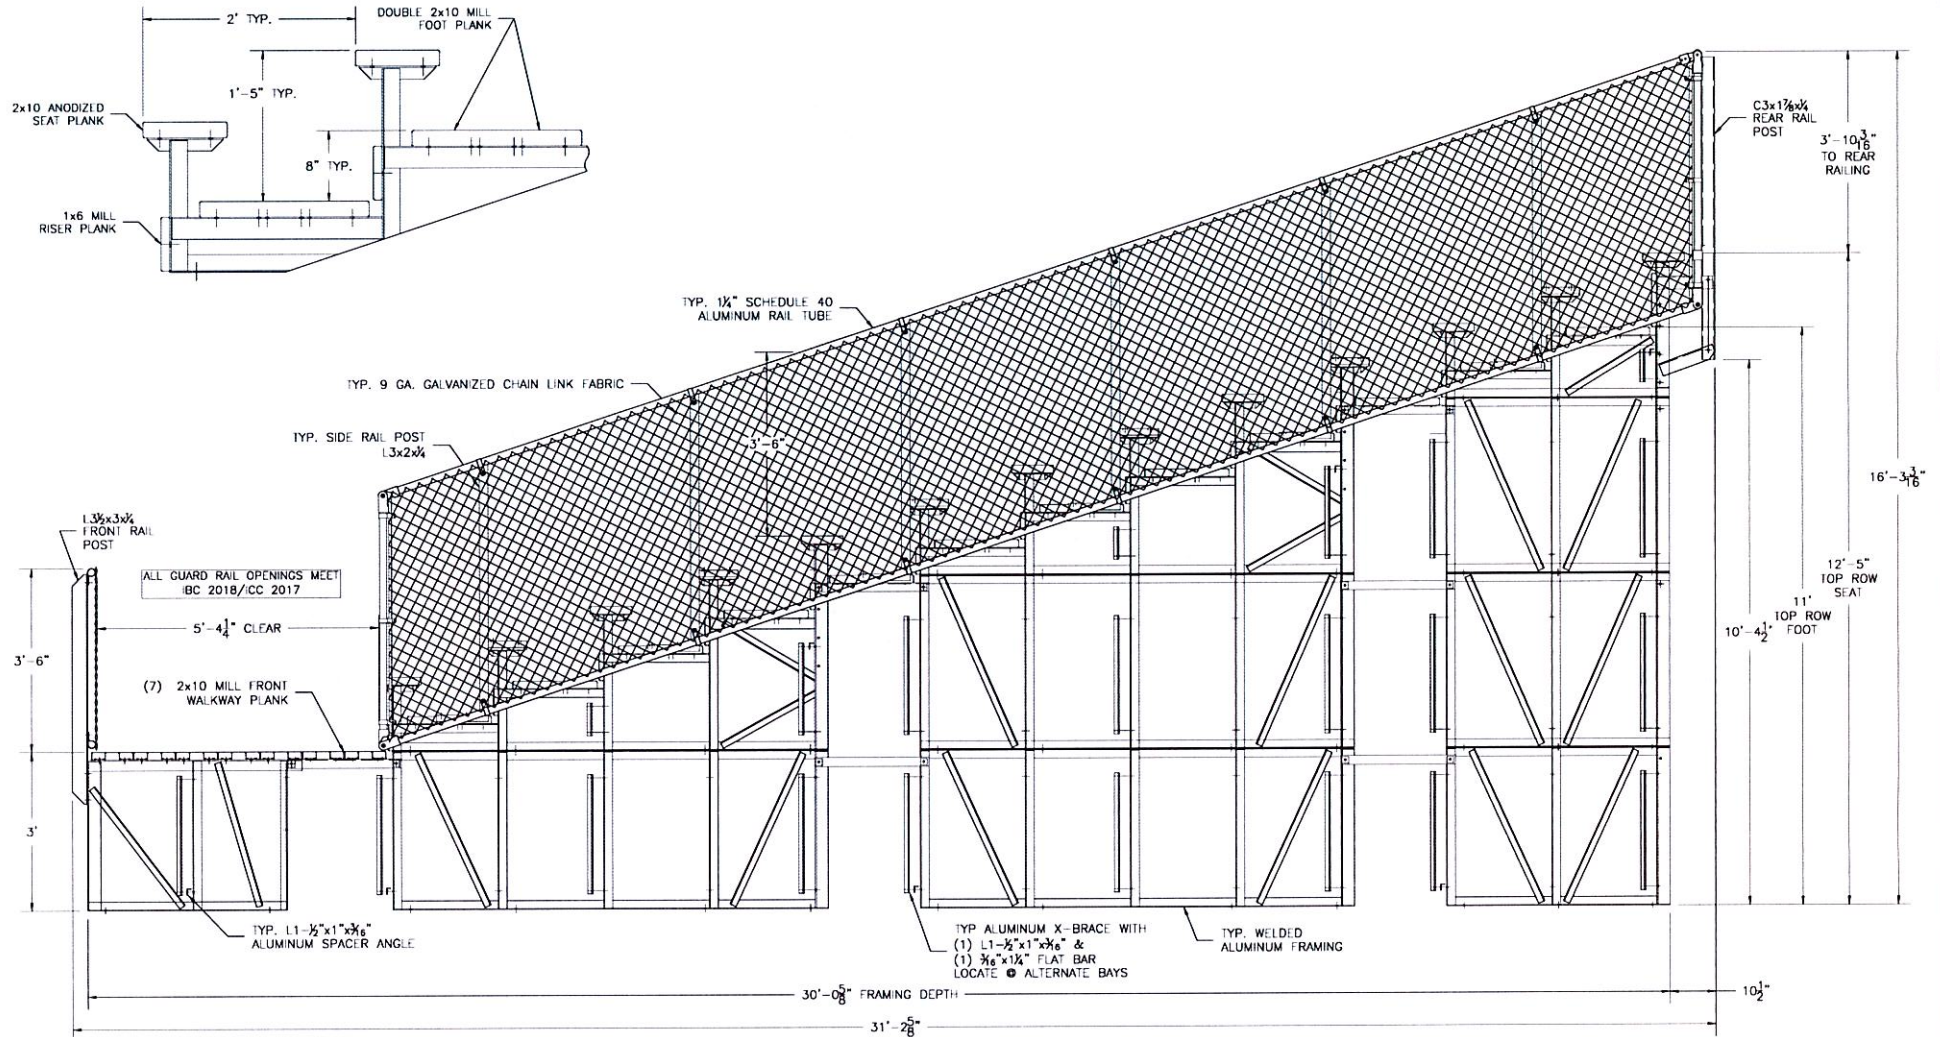

**ECONOMICAL MILL FINISH FOOT PLANK AND RISERS HAVE BEEN SPECIFIED ON THIS BLEACHER DESIGN. NRS WILL NOT BE RESPONSIBLE FOR DISCOLORATION OR STAINING (DARK BLACK, BROWN, OR WHITE RESIDUE) RESULTING FROM UNAVOIDABLE CONDENSATION THAT OCCURS DURING PACKING, TRANSPORTING AND STORAGE, PRECEDING AND/OR DURING INSTALLATION. REMOVAL OF THESE STAINS OR REPLACEMENT OF BOARDS UPON COMPLETION OF INSTALLATION IS NOT PART OF THIS CONTRACT BECAUSE STAINED MILL FINISH BOARDS MEET ALL SPECIFIED REQUIREMENTS. A CLEAR ANODIZED FINISH MAY BE QUOTED AT AN ADDITIONAL COST TO AVOID POTENTIAL DISCOLORATION OR STAINING.

NRS
National Recreation Systems
A FANCORE COMPANY

PH: 888-568-9064 FAX: 260-482-7448 WWW.BLEACHERS.NET

This drawing and all information contained herein is the property of NATIONAL RECREATION SYSTEMS, INC. and is not to be reproduced without the express written permission of this manufacturer. We assume no responsibility for unauthorized use of this drawing. NATIONAL RECREATION SYSTEMS, INC. is not responsible for local permits and occupancy requirements.

PROJECT/SITE: 36A-13XXXXXCLXX_01 SALES

DESCRIPTION: 36" ELEV. 13 ROW ELEVATION VIEW

DRAWN BY: JCM DATE: 3/15/24 REVISION: 0 SCALE: N.T.S. SHEET NUMBER: EL.1