

SIMPSON CO. CTE IMPROVEMENTS
ALTERNATIVE SCHOOL ADDITIONS
FRANKLIN, KENTUCKY
ROSSTARRANT NO. 23066
MARCUM NO. 24519

MPE REQUEST FOR PROPOSAL

TO: Gaoda Jiang, Rosstarrant Architects

CC: Greg Hosfield, Rosstarrant Architects
Michael Orange, Marcum Engineering

FROM: Jwain White, Marcum Engineering

DATE: February 6, 2026

SUBJECT: RFP Tennis Building (PR-004)

RATIONALE:

The Owner requests a restroom building next to the tennis courts as a change order to the CTE Renovation and Alternative School addition project.

DESCRIPTION OF REQUEST:

The Contractor shall provide MPE as indicated on the attached new and revised drawings.

The proposal shall be broken down to reflect labor, material, any unit costs, and mark-up.

ATTACHMENTS:

1. Revised DU1.1 – Site Electrical Demolition Plan
2. Revised U1.1 – Site Electrical Plan
3. Revised U1.3 – Sanitary Sewer & Water Utility Plan
4. ME2.1 – Tennis Court R.R. Building Mech-Elec Plan
5. ME2.2 – Tennis Court R.R. Building Mech-Elec Schedules

END OF DOCUMENT

ELECTRICAL DEMOLITION TAG NOTES

APPROVED BY THE DEMOLITION DIVISION

1. ALL ELECTRICAL TAGS MUST BE PLACED ON THE ELECTRICAL PANEL OR DISCONNECT SWITCH OF THE DEMOLITION UNIT.
2. THE ELECTRICAL TAGS MUST BE PLACED ON THE ELECTRICAL PANEL OR DISCONNECT SWITCH OF THE DEMOLITION UNIT.
3. THE ELECTRICAL TAGS MUST BE PLACED ON THE ELECTRICAL PANEL OR DISCONNECT SWITCH OF THE DEMOLITION UNIT.

GENERAL SITE UTILITY NOTES

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
11. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
12. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
14. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
15. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
16. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
18. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
19. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
20. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

SITE LEGEND

- EXISTING ELECTRICAL UTILITY
- EXISTING UNDERGROUND GAS
- EXISTING UNDERGROUND WATER
- EXISTING UNDERGROUND FIBER

NOTICE
ALL ELECTRICAL TAGS MUST BE PLACED ON THE ELECTRICAL PANEL OR DISCONNECT SWITCH OF THE DEMOLITION UNIT.

EXCAVATION NOTE

THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

BURIED UTILITIES NOTE

THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

SITE ELECTRICAL DEMOLITION

MARCUM ENGINEERING, LLC
1000 S. COLLEGE ST., FRANKLIN, KY 42134
502.525.1234

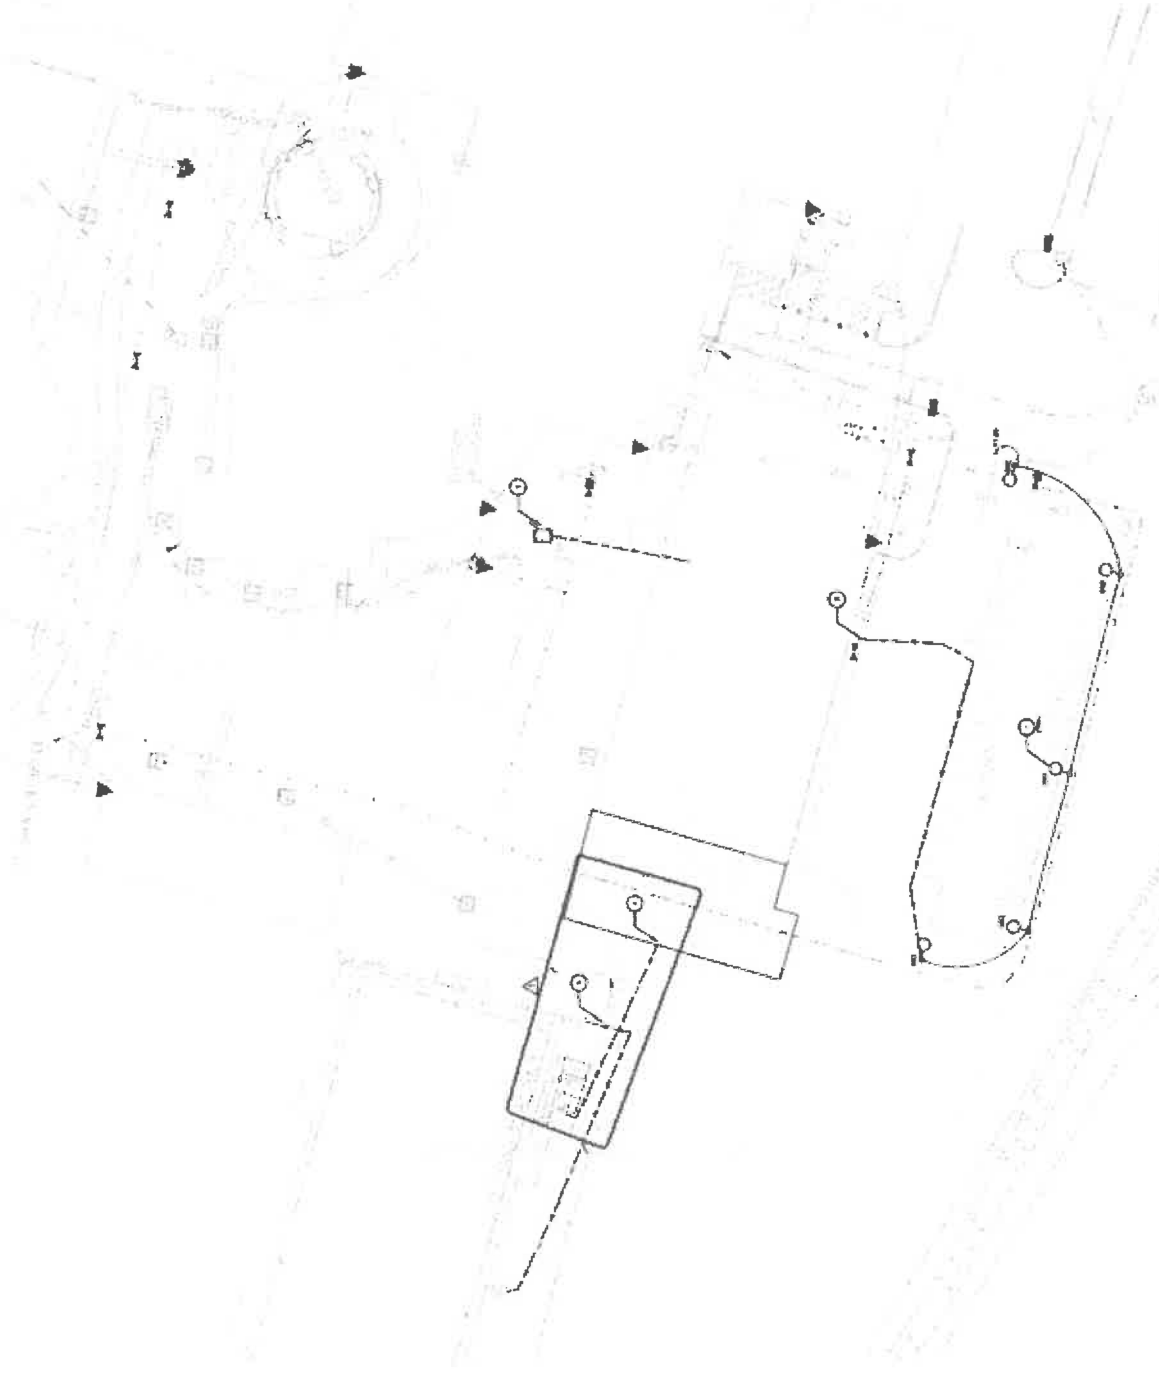
DUI.1

Simpson Co. CTE Improvements & Alternative School Addition
400 S College St, Franklin, KY 42134

rossi architects
architects

ELECTRICAL CONSTRUCTION TAG NOTES

- APPLY TO THIS SHEET ONLY
1. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 2. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 3. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 4. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 5. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 6. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 7. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 8. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 9. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).
 10. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE KENTUCKY ELECTRICAL CODE (KEC).



Site Electrical Technology School
Sheet A

MARCUM
 ENGINEERS, LLC
 1000 N. 10th St.
 Louisville, KY 40202
 (502) 581-1100
 www.marcumllc.com

Kentucky 811
 The Most Reliable Digging Safety Service
 Call 811 or 800-453-7777
 www.kentucky811.com

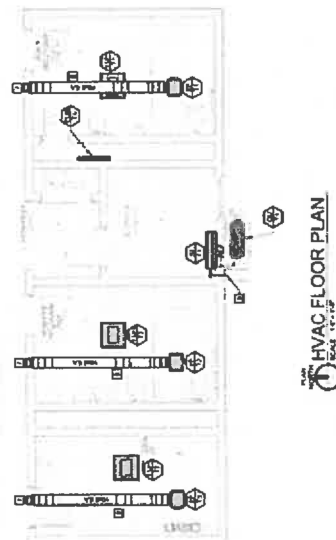
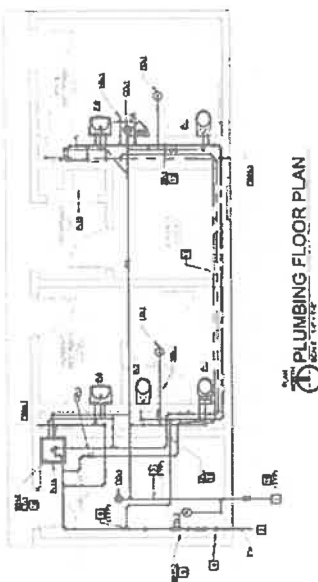
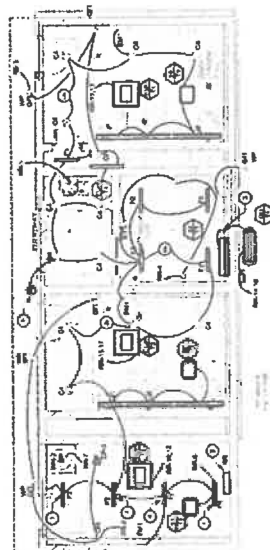

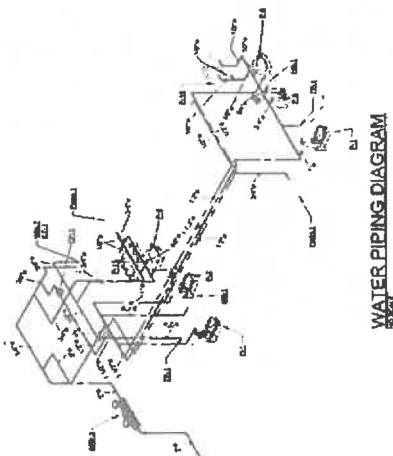
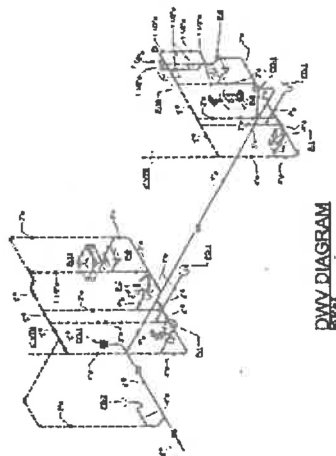
PROJECT NO. 20-03
DATE: 10/1/20
BY: [Signature]
CHECKED: [Signature]
APPROVED: [Signature]

SITE ELECTRICAL TECHNOLOGY SCHOOL
Simpson Co. CTE Improvements & Alternative School Addition
400 S College St, Frankln, KY 42134
Simpson County Board of Education



rossant architects
 1000 N. 10th St.
 Louisville, KY 40202
 (502) 581-1100
 www.rossant.com

U1.1

[illegible][illegible]

ELECTRICAL
CONSTRUCTION TAG NOTES

Labels to be filled out by the installer only.

1. **DATE** _____

2. **TIME** _____

3. **LOCATION** _____

4. **DESCRIPTION** _____

5. **REMARKS** _____

6. **INITIALS** _____

7. **SIGNATURE** _____

8. **DATE** _____

9. **TIME** _____

10. **LOCATION** _____

11. **DESCRIPTION** _____

12. **REMARKS** _____

13. **INITIALS** _____

14. **SIGNATURE** _____

15. **DATE** _____

16. **TIME** _____

17. **LOCATION** _____

18. **DESCRIPTION** _____

19. **REMARKS** _____

20. **INITIALS** _____

21. **SIGNATURE** _____

22. **DATE** _____

23. **TIME** _____

24. **LOCATION** _____

25. **DESCRIPTION** _____

26. **REMARKS** _____

27. **INITIALS** _____

28. **SIGNATURE** _____

29. **DATE** _____

30. **TIME** _____

31. **LOCATION** _____

32. **DESCRIPTION** _____

33. **REMARKS** _____

34. **INITIALS** _____

35. **SIGNATURE** _____

36. **DATE** _____

37. **TIME** _____

38. **LOCATION** _____

39. **DESCRIPTION** _____

40. **REMARKS** _____

41. **INITIALS** _____

42. **SIGNATURE** _____

43. **DATE** _____

44. **TIME** _____

45. **LOCATION** _____

46. **DESCRIPTION** _____

47. **REMARKS** _____

48. **INITIALS** _____

49. **SIGNATURE** _____

50. **DATE** _____

51. **TIME** _____

52. **LOCATION** _____

53. **DESCRIPTION** _____

54. **REMARKS** _____

55. **INITIALS** _____

56. **SIGNATURE** _____

57. **DATE** _____

58. **TIME** _____

59. **LOCATION** _____

60. **DESCRIPTION** _____

61. **REMARKS** _____

62. **INITIALS** _____

63. **SIGNATURE** _____

64. **DATE** _____

65. **TIME** _____

66. **LOCATION** _____

67. **DESCRIPTION** _____

68. **REMARKS** _____

69. **INITIALS** _____

70. **SIGNATURE** _____

71. **DATE** _____

72. **TIME** _____

73. **LOCATION** _____

74. **DESCRIPTION** _____

75. **REMARKS** _____

76. **INITIALS** _____

77. **SIGNATURE** _____

78. **DATE** _____

79. **TIME** _____

80. **LOCATION** _____

81. **DESCRIPTION** _____

82. **REMARKS** _____

83. **INITIALS** _____

84. **SIGNATURE** _____

85. **DATE** _____

86. **TIME** _____

87. **LOCATION** _____

88. **DESCRIPTION** _____

89. **REMARKS** _____

90. **INITIALS** _____

91. **SIGNATURE** _____

92. **DATE** _____

93. **TIME** _____

94. **LOCATION** _____

95. **DESCRIPTION** _____

96. **REMARKS** _____

97. **INITIALS** _____

98. **SIGNATURE** _____

99. **DATE** _____

100. **TIME** _____

101. **LOCATION** _____

102. **DESCRIPTION** _____

103. **REMARKS** _____

104. **INITIALS** _____

105. **SIGNATURE** _____

106. **DATE** _____

107. **TIME** _____

108. **LOCATION** _____

109. **DESCRIPTION** _____

110. **REMARKS** _____

111. **INITIALS** _____

112. **SIGNATURE** _____

113. **DATE** _____

114. **TIME** _____

115. **LOCATION** _____

116. **DESCRIPTION** _____

117. **REMARKS** _____

118. **INITIALS** _____

119. **SIGNATURE** _____

120. **DATE** _____

121. **TIME** _____

122. **LOCATION** _____

123. **DESCRIPTION** _____

124. **REMARKS** _____

125. **INITIALS** _____

126. **SIGNATURE** _____

127. **DATE** _____

128. **TIME** _____

129. **LOCATION** _____

130. **DESCRIPTION** _____

131. **REMARKS** _____

132. **INITIALS** _____

133. **SIGNATURE** _____

134. **DATE** _____

135. **TIME** _____

136. **LOCATION** _____

137. **DESCRIPTION** _____

138. **REMARKS** _____

139. **INITIALS** _____

140. **SIGNATURE** _____

141. **DATE** _____

142. **TIME** _____

143. **LOCATION** _____

144. **DESCRIPTION** _____

145. **REMARKS** _____

146. **INITIALS** _____

147. **SIGNATURE** _____

148. **DATE** _____

149. **TIME** _____

150. **LOCATION** _____

151. **DESCRIPTION** _____

152. **REMARKS** _____

153. **INITIALS** _____

154. **SIGNATURE** _____

155. **DATE** _____

156. **TIME** _____

157. **LOCATION** _____

158. **DESCRIPTION** _____

159. **REMARKS** _____

160. **INITIALS** _____

161. **SIGNATURE** _____

162. **DATE** _____

163. **TIME** _____

164. **LOCATION** _____

165. **DESCRIPTION** _____

166. **REMARKS** _____

167. **INITIALS** _____

168. **SIGNATURE** _____

169. **DATE** _____

170. **TIME** _____

171. **LOCATION** _____

172. **DESCRIPTION** _____

173. **REMARKS** _____

174. **INITIALS** _____

175. **SIGNATURE** _____

176. **DATE** _____

177. **TIME** _____

178. **LOCATION** _____

179. **DESCRIPTION** _____

180. **REMARKS** _____

181. **INITIALS** _____

182. **SIGNATURE** _____

183. **DATE** _____

184. **TIME** _____

185. **LOCATION** _____

186. **DESCRIPTION** _____

187. **REMARKS** _____

188. **INITIALS** _____

189. **SIGNATURE** _____

190. **DATE** _____

191. **TIME** _____

192. **LOCATION** _____

193. **DESCRIPTION** _____

194. **REMARKS** _____

195. **INITIALS** _____

196. **SIGNATURE** _____

197. **DATE** _____

198. **TIME** _____

199. **LOCATION** _____

200. **DESCRIPTION** _____

201. **REMARKS** _____

202. **INITIALS** _____

203. **SIGNATURE** _____

204. **DATE** _____

205. **TIME** _____

206. **LOCATION** _____

207. **DESCRIPTION** _____

208. **REMARKS** _____

209. **INITIALS** _____

210. **SIGNATURE** _____

211. **DATE** _____

212. **TIME** _____

213. **LOCATION** _____

214. **DESCRIPTION** _____

215. **REMARKS** _____

216. **INITIALS** _____

217. **SIGNATURE** _____

218. **DATE** _____

219. **TIME** _____

220. **LOCATION** _____

221. **DESCRIPTION** _____

222. **REMARKS** _____

223. **INITIALS** _____

224. **SIGNATURE** _____

225. **DATE** _____

226. **TIME** _____

227. **LOCATION** _____

228. **DESCRIPTION** _____

229. **REMARKS** _____

230. **INITIALS** _____

231. **SIGNATURE** _____

232. **DATE** _____

233. **TIME** _____

234. **LOCATION** _____

235. **DESCRIPTION** _____

236. <

SECTION 074113 - METAL ROOF PANELS**PART 1 GENERAL****1.01 SECTION INCLUDES**

- A. Architectural roofing system of preformed steel panels.
 - 1. The specified architectural standing seam roof panels are to be factory fabricated in one piece. No mid-span lapped horizontal seaming will be accepted.
- B. Soffit Panels.
- C. Gutters and Downspouts.
- D. Attachment system.
- E. Finishes.
- F. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 061000 - Rough Carpentry: Roof blocking.
- B. Section 079005 - Joint Sealers: Field-installed sealants.
- C. Section 092116 - Gypsum Board Assemblies: Hat channels for soffit panel support.

1.03 REFERENCE STANDARDS

- A. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2015.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2015a.
- C. ASTM E1592 - Standard Test Method for Structural Performance of Sheet Metal Roof and Siding Systems by Uniform Static Air Pressure Difference; 2005 (Reapproved 2012).
- D. ASTM E1646 - Standard Test Method for Water Penetration of Exterior Metal Roof Panel Systems by Uniform Static Air Pressure Difference; 1995 (Reapproved 2011).
- E. ASTM E1680 - Standard Test Method for Rate of Air Leakage Through Exterior Metal Roof Panel Systems; 2011.

1.04 SUBMITTALS

- A. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Storage and handling requirements and recommendations.
 - 2. Installation methods.
 - 3. Specimen warranty.
- B. Shop Drawings: Include layouts of roof panels, details of edge and penetration conditions, spacing and type of connections, flashings, underlayments, and special conditions.
 - 1. Show work to be field-fabricated or field-assembled.
- C. Selection Samples: For each roofing system specified, submit color chips representing manufacturer's full range of available colors and patterns. Submit actual samples not photo reproductions.
- D. Test Reports: Indicate compliance of metal roofing system to specified requirements.
- E. Warranty: Submit specified manufacturer's 20 year finish and 20 year weathertightness warranty and ensure that forms have been completed in Owner's name and are registered with manufacturer.

- F. Manufacturer certificate, located at the end of this Section, to be submitted within 24 hours of the bid, for the proposed metal roof panel system confirming that the metal roof panel system installer is approved to install the proposed metal roof panel system.

1.05 COMPLETION MEETING

- A. A meeting shall be held at the completion of the project and attended by all parties that were present at the pre-job conference. A punch list of items required for completion shall be compiled by the Contractor and the Manufacturer's representative. The Contractor shall complete all punch list items and acquire Manufacturer's warranty for final submittal to Architect.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section, with not less than five years of documented experience.
- B. Installer Qualifications: Company trained and authorized by roofing system manufacturer, with minimum (5) five years of experience, in type of work specified.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Store roofing panels on site in protective packaging to prevent damage prior to installation.

1.08 WARRANTY

- A. General Warranty: The warranties specified in this Article shall not deprive the Owner of other rights the Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by the Contractor under requirements of the Contract Documents. Three executed copies of all warranties must be submitted to the Architect.
- B. Finish Warranty: Manufacturer's 20-year finish warranty stating products to be free of corrosion, checking, crazing, chalking, discoloring, fading, oxidation, and that exposed finish surface will not peel, crack, chip, or spall.
 - 1. Excessive color change/fading greater than 5 NBS (Hunter) units and passing 5000 hrs per ASTM D 2249-85, ASTM D 2244 and ASTM D 822-85 respectively.
 - 2. Chalking shall not be less than a rating of No. 8 per ASTM D 659 and ASTM D 4214.
 - 3. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
- C. Manufacturer's "No Monetary Limit" Warranty: The entire installation from the deck up, including but not limited to insulation, hat channels, fasteners, metal roofing and edge metals shall be warranted against defects in material and workmanship as evidenced by leaks, as required to maintain roofing system in a watertight condition for the period stated below starting from the date of final acceptance by the Owner as herein before specified. Should leak occur, the manufacturer shall repair or replace the roof material as required to provide a watertight condition at its own expense, with no dollar limit or prorated amount. The warranty shall cover fully and completely the entire roofing system and the requirements as specified herein. This warranty shall be jointly signed by the Manufacturer of the primary roofing material and the authorized installer. The guarantee is for a complete system and shall not be limited by any previous work accomplished on the roof prior to this contract and elected to remain as a part of the system herein specified:
 - 1. Total Systems Warranty shall be for a period of twenty (20) years from the date of substantial completion.
 - 2. Repairs and replacements required because of events beyond the Contractor's / Installer's / Manufacturer's control and beyond the limits specified herein shall be completed by the Contractor / Installer and paid for by the Owner.
 - 3. Installer shall provide a typed certificate stating the following:
 - a. Type of roof.
 - b. Installer.
 - c. Installer's address and telephone number.

- d. Manufacturer.
 - e. Manufacturer's address and telephone number.
 - f. Who to contact in case of roof failure.
 - g. Warranty period with beginning and ending dates. Certificate shall be framed and bolted (not hung) on the wall as directed by Architect. Copies of certificate shall be included with manufacturer's written warranty and submitted to Architect
 - h. Any representative who inspects the roof must copy all inspection reports to the office of Ross-Tarrant Architects, Inc. for the life of the roof.
- D. Structural Performance: Provide warranty by roof panel system manufacturer against perforation or structural failure of roof panels for period of twenty (20) years.
- E. All warranties shall commence on Date of Substantial Completion for building.
- F. Contractor's Warranty: Roofing contractor shall provide a written two year warranty for materials and workmanship commencing with the date of substantial completion. The warranty shall cover all labor and all material necessary to maintain complete water tightness, including that required to repair and all roof leaks and water infiltration through the roof, flashings, and wall copings in any configuration including standing water at no additional cost to the Owner.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Subject to compliance with requirements, manufacturers offering the following products that may be incorporated into the work include:
- B. Basis of Design: Design concept and the drawings indicate the size, profiles, dimensional requirements and aesthetics of the following:
- 1. DMI - Span Lock SL20 (2 inch rib height) Continuous mechanically seamed connections with concealed anchor clips. Exposed fasteners in the panel ends will NOT be accepted.
- C. Products by other manufacturers may be considered provided deviations in dimensions and profiles are minor and do not change the design concept as judged by the Architect.
- 1. ATAS International, Inc: www.atas.com.
 - 2. Berridge Manufacturing Company: www.berridge.com/#sle.
 - 3. Nucor IPG/Centria: www.centria.com
 - 4. DMI: www.dmimetals.com
 - 5. Englert, Inc: www.englertinc.com.
 - 6. Holcim Elevate (formerly Firestone Building Products LLC): www.holcimelevate.com.
 - 7. Nucor IPG/Metl-Span: www.metlspan.com/#sle.
 - 8. Innovative Metals Co.: www.imetco.com
 - 9. Cornerstone Building Brands/MBCI: www.mbc.com

2.02 PERFORMANCE REQUIREMENTS

- A. Metal Roof Panels: Provide complete roofing assemblies, including roof panels, clips, fasteners, connectors, and miscellaneous accessories, tested for compliance with the following minimum standards:
- 1. Structural Design Criteria: Provide panel assemblies designed to safely support design loads at support spacing indicated, with deflection not to exceed $L/180$ of span length(L) when tested in accordance with ASTM E1592.
 - 2. Overall: Complete weathertight system tested and approved in accordance with ASTM E1592.
 - 3. Thermal Movement: Design system to accommodate without deformation anticipated thermal movement over ambient temperature range of 100 degrees F.

2.03 ARCHITECTURAL METAL ROOF PANELS

- A. Architectural Metal Roofing: Provide complete engineered system complying with specified requirements and capable of remaining weathertight while withstanding anticipated movement of substrate and thermally induced movement of roofing system.
- B. Metal Panels: Factory-formed panels with factory-applied finish.
 - 1. Steel Panels:
 - a. Zinc-coated steel conforming to ASTM A 654; minimum G90 galvanizing or ASTM 792 Galvalume.
 - b. Steel Thickness: Minimum .023 inch (24 gauge)
 - 2. Profile: Standing seam, with minimum 2.0 inch seam height; concealed fastener system for field seaming with special tool.
 - 3. Texture: Smooth, with intermediate ribs for added stiffness.
 - 4. Length: Full length of roof slope, without lapped horizontal joints.
 - 5. Width: Maximum panel coverage of 16 to 18 inches.

2.04 SOFFIT PANELS

- A. Preformed Metal Soffit Panels: Pre-finished, perforated, .032 ga. aluminum:
 - 1. Basis of Design: Design concept and the drawings indicate the size, profiles, dimensional requirements and aesthetics of the following:
 - a. DMI - FP10
 - 2. Panels to have concealed fasteners.
 - 3. Profile to be flush, 12" wide.
 - 4. Panels to be vented. Refer to drawings for vented panel locations.
 - 5. Color: Selected by Architect from same color choices as metal roof panel.

2.05 VAPOR BARRIER

- A. 8-mil thick, reinforced three-ply polyethylene vapor barrier, coated both sides, with a .04 perm rating.
 - 1. Raven Industries: Dura-Skrim 8WB: www.ravenfd.com
- B. Provide and install if required by the roofing manufacturer for the requirements of the full system warranty.

2.06 ROOF UNDERLAYMENT

- A. Contractor to coordinate with metal roof panel manufacturer on use of asphalt felt or synthetic felt as part of the total system warranty.
 - 1. Type II (30#) asphalt saturated, non-perforated felt underlayment.
 - a. Roof Pitch 3:12 to 4:12: Two layers.
 - b. Roof Pitch 4:12 or above: One layer.
- B. Synthetic Felt Underlayment: Meet Class A Fire ASTM E108 and ASTM D226
 - 1. Synthetic felt underlayment is not to be used as a replacement for self-adhered waterproof underlayment.
 - a. Interwrap, Inc - Titanium UDL 30: www.interwrap.com
 - b. Other manufacturers approved by the metal roof panel manufacturer to meet full system warranty requirements.

2.07 SELF ADHERED WATERPROOF UNDERLAYMENT

- A. Install for a dimension of 72" up the slope from the eave, rake edges, valleys, and 72" in from the gables or as required by roofing manufacturer based on roof slope. Synthetic felt underlayment is not to be used as a replacement for self-adhered waterproof underlayment. Acceptable manufacturers offering the following products that may be incorporated into the work include:
 - 1. W.R. Grace-Ice and Water Shield.
 - 2. DMI DynaClad Ultra HT Wind and Water Seal.

3. GAF-Ice and Water Shield.
4. Firestone Clad-Gard SA.
5. Mid-States Asphalt (MSA): Quik Stick HT: www.msarroof.com
6. Polyglass USA, Inc: Polystick MTS High Temperature: www.polyglass.com
7. Protecto Wrap Company: Jiffy Seal Ice and Water Guard HT: www.protectowrap.com
8. Other manufacturers approved by the metal roof panel manufacturer to meet the full system warranty requirements.

2.08 GUTTERS AND DOWNSPOUTS

- A. Provide gutters and downspouts in shapes and sizes indicated, fabricated in longest continuous length possible. Include steel straps formed from at least 0.028-inch- (0.7-mm-) thick, galvanized steel sheet; hangers or other attachment devices; end plates; and trim and other accessories indicated or required for complete installation. Expansion joints are to be utilized so as to not have lapped gutter joints.
- B. Provide gutters and downspouts fabricated from the following metal:
 1. Prefinished formed-steel sheet in thickness indicated, but not less than the following:
 - a. Thickness: 22 ga. for gutters.
 - b. Thickness: 22 ga. for downspouts.
- C. Gutters and downspout sizes:
 1. Gutter to be profile and size as shown on the drawings.
 2. Downspouts: Refer to the drawings for size and location.
- D. Gutter and Downspout Anchors and Supports:
 1. Gutter Supports: Straps and Hangers. 1 inch wide, 0.050 inch thick internal aluminum strap at 30 inch on center at top of gutter. Alternate location with 1 inch wide 0.125 inch thick external hanger at bottom location 30 inch on center for support of gutter.
 2. Downspout Supports: Straps. Provide three anchor straps per 10 foot section.
- E. Color: Selected by Architect from same color choices as metal roof panel.
- F. Wire Ball Downspout Strainer: Provide a wire ball downspout strainer at every downspout location.

2.09 ATTACHMENT SYSTEM

- A. Concealed System: Provide manufacturer's standard stainless steel or nylon-coated aluminum concealed anchor clips designed for specific roofing system and engineered to meet performance requirements, including anticipated thermal movement.
- B. Based upon Contractor's choice of standing seam panel manufacturer, it is the Contractor's option to either provide wood blocking or support plate (gauge per manufacturers requirement) at all ridge, valley, rake and eaves to provide a complete warranted system.

2.10 FABRICATION

- A. Panels: Provide factory fabricated panels and accessory items, using manufacturer's standard processes as required to achieve specified appearance and performance requirements.
 1. Panels to be manufactured on a fixed base, multi-station roll former with a minimum of 26 stations.
 2. Coil to be tension leveled prior to being received by the panel manufacturer.
 3. Metal coil to be tension leveled by the panel manufacturer prior to the start of panel fabrication.
- B. Joints: Provide captive gaskets, sealants, or separator strips at panel joints to ensure weathertight seals, eliminate metal-to-metal contact, and minimize noise from panel movements.

2.11 FINISHES: PANEL, TRIM, GUTTER, DOWNSPOUT AND VISIBLE ACCESSORIES

- A. PVDF (Polyvinylidene Fluoride) Coating: Superior Performance Organic Finish, AAMA 2605; multiple coat, thermally cured fluoropolymer finish system.

1. Minimum total dry film thickness of 0.9 mil; color and gloss as selected from manufacturer's standards.

2.12 ACCESSORIES

- A. Miscellaneous Sheet Metal Items: Provide flashings, gutters, downspouts, trim, moldings, closure strips, preformed crickets, caps, and equipment curbs of the same material, thickness, and finish as used for the roofing panels. Items completely concealed after installation may optionally be made of stainless steel.
- B. Rib and Ridge Closures: Provide prefabricated, close-fitting components of steel with corrosion resistant finish or combination steel and closed-cell foam.
- C. High Temperature Pipes and Penetrations: Provide high-temp rated boots or sheet metal collars with clamping rings and sealant to separate pipes from roofing.
- D. Sealants:
 1. Exposed Sealant: Elastomeric; silicone, polyurethane, or silyl-terminated polyether/polyurethane.
 2. Concealed Sealant: Non-curing butyl sealant or tape sealant.
 3. Seam Sealant: Factory-applied, non-skinning, non-drying type.
- E. Snow Guards: Non-penetrating attachment system. Clamps to match standing seam profile and height. Brackets and cross members to be provided in color to match standing seam roof panel. Color as selected by Architect.
 1. Basis of Design: Design concept and the drawings indicate the size, profiles, dimensional requirements and aesthetics of the following:
 - a. SnoGem, Inc.: 2" SnoGem iClad SnoCube Snow Retention System with 1 inch Blockade Plates.
 2. Manufacturer: Subject to compliance with requirements, manufacturers offering the following products that may be incorporated into the work include:
 - a. Alpine Snowguards: SnowMax: www.alpinesnowguards.com
 - b. Metal Roof Innovations Ltd/Dynamic Fastener.: Dyna-Clamp, Dyna-Guard, Sno-Dam, Dyna-Clip www.dynamicfastener.com
 - c. SnoBlox Snow Guards: Color Rail with IceStopper: www.snoblox.com
 - d. Sno-Gem, Inc.: www.snogem.com

2.13 FABRICATION

- A. Panels: Fabricate panels and accessory items at factory, using manufacturers standard processes as required to achieve specified appearance and performance requirements.
 1. Panels to be manufactured on a fixed base, multi-station roll former with a minimum of 26 stations.
 2. Coil to be tension leveled prior to being received by the panel manufacturer.
 3. Metal coil to be tension leveled by the panel manufacturer prior to the start of panel fabrication.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin installation of preformed metal roof panels until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.02 INSTALLATION

- A. Overall: Install roofing system in accordance with approved shop drawings and panel manufacturer's instructions and recommendations, as applicable to specific project conditions. Anchor all components of roofing system securely in place while allowing for thermal and structural movement.
 - 1. Install roofing system with concealed clips and fasteners, except as otherwise recommended by manufacturer for specific circumstances.
 - 2. Minimize field cutting of panels. Where field cutting is absolutely required, use methods that will not distort panel profiles. Use of torches for field cutting is absolutely prohibited.
- B. Accessories: Install all components required for a complete roofing assembly, including flashings, gutters, downspouts, trim, moldings, closure strips, preformed crickets, caps, equipment curbs, rib closures, ridge closures, and similar roof accessory items.
- C. Roof Panels: Install panels in strict accordance with manufacturer's instructions, minimizing transverse joints except at junction with penetrations.
 - 1. Form weathertight standing seams incorporating concealed clips, using an automatic mechanical seaming device approved by the panel manufacturer.
 - 2. Provide sealant tape or other approved joint sealer at lapped panel joints.
 - 3. Install sealant or sealant tape, as recommended by panel manufacturer, at end laps and side joints.

3.03 CLEANING AND PROTECTION

- A. Clean exposed sheet metal work at completion of installation. Remove grease and oil films, excess joint sealer, handling marks, and debris from installation, leaving the work clean and unmarked, free from dents, creases, waves, scratch marks, or other damage to the finish.
- B. Do not permit storage of materials or roof traffic on installed roof panels. Provide temporary walkways or planks as necessary to avoid damage to completed work. Protect roofing until completion of project.
- C. Touch-up, repair, or replace damaged roof panels or accessories before Date of Substantial Completion.

END OF SECTION 074113

260115 Simpson Co CTE Tennis Court RR Bldg Hardware Changes

January 15th, 2026

1. Assign new Door P001 to new HW Set 07 as follows:

Hardware Set 07

(1)	Mortise Cylinder	613	BES
	Note: Hardware Supplier to coordinate cam type for proper operation.		
(1)	SFIC Cylinder Core	626	BES

Note 1: All hardware including lockset to accept Best mortise cylinder by door supplier.

2. Assign new Doors P002.1 and P004 to new HW Set 08 as follows:

Hardware Set 08

(3)	Butt Hinges	BB1191 4.5 X 4.5	630	HAG
(1)	Classroom/Double Cyl Deadbolt	314-1/4ST x Less Cylinders	626	YAL
(1)	Push Plate	1809-4 x RC x CFC	630	TRI
(1)	Pull Plate	1014-3B x RC x CFC x CFT	630	TRI
(2)	Mortise Cylinder		613	BES
(1)	Closer, Regular Arm	4040XP Reg	689	LCN
(1)	Kick Plate	KO050 8 x 2LDW x CS x B4E	630	TRI
(1)	Mop Plate	KM050 4 x 1LDW x CS x B4E	630	TRI
(1)	Wall Stop, Convex	1270CX	626	TRI
(1)	Lock Guard, In-swinging	ILP 212 - CP	652	DJO
(1)	Cat H Jamb Seal Set	5924	628	LEG
(1)	Door Bottom	7111	628	LEG
(1)	1/4" Saddle Threshold	3545 x RCE	628	LEG

Note 1: 3/8" door undercut required for proper mating of door bottom with seal integral to threshold.

3. Assign new Door P002.2 to new HW Set 02C as follows:

Hardware Set 02C

(3)	Butt Hinges	BB1191 4.5 X 4.5	630	HAG
(1)	Storeroom Lock	93K7D-15D-S3	626	BES
(1)	SFIC Cylinder Core		626	BES
(1)	Mop Plate	KM050 4 x 1LDW x CS x B4E	630	TRI
	Note: Install on pull side of door.			
(1)	Wall Stop, Convex	1270CX	626	TRI

4. Assign new Door P003 to new HW Set 02D as follows:

Hardware Set 02D

(3)	Butt Hinges	BB1191 4.5 X 4.5	630	HAG
(1)	Storeroom Lock	93K7D-15D-S3	626	BES
(1)	SFIC Cylinder Core		626	BES

(1)	Closer, HD Parallel Arm	4040XP EDA	689	LCN
(1)	Closer Spacer	51875-52250		LEG
Note 1: Do not cut top jamb seal for closer arm bracket. Lower the closer on the door and mount closer shoe to jamb seal. Use spacer for 5 th closer screw.				
(1)	Kick Plate	KO050 8 x 2LDW x CS x B4E	630	TRI
(1)	Wall Stop, Convex	1270CX	626	TRI
(1)	Lock Guard, Cylindrical Lock	1082-6S	630	TRI
(1)	Cat H Jamb Seal Set	5924	628	LEG
(1)	Panic Threshold	356MA x RCE	628	LEG

5. Assign new Door P005 to new HW Set 02E as follows:

Hardware Set 02E

(3)	Butt Hinges	BB1191 4.5 X 4.5	630	HAG
(1)	Storeroom Lock	93K7D-15D-S3	626	BES
(1)	SFIC Cylinder Core		626	BES
(1)	Closer, Regular Arm	4040XP Reg	689	LCN
(1)	Kick Plate	KO050 16 x 2LDW x CS x B4E	630	TRI
(1)	Wall Stop/Holder w/Shim	1283-6S x (1) Z900-35643.628 1" Shim	628	TRI
Note: Locate in inverted "U" orientation approx. 4" down and in from top lock corner of door.				
(1)	Lock Guard, In-swinging	ILP 212 - CP	652	DJO
(1)	Cat H Jamb Seal Set	5924	628	LEG
(1)	Door Bottom	7111	628	LEG
(1)	¼" Saddle Threshold	3545 x RCE	628	LEG

Note 1: 3/8" door undercut required for proper mating of door bottom with seal integral to threshold.

END OF DOCUMENT

FACPAC Contract Change Order

Supplemental Information Form (Ref# 65449)

Form Status: Saved

Tier 1 Project: CTE Improvements, Alternative School Addition, SES Roadway & Paving
 BG Number: 23-425 District: Simpson County (HB678) (535)
 Status: Active Phase: Project Initiation (View Checklist)

Contract: Premier Painting LLC, 0099, 099
 Type: CM Bid Package Proposed

Change Order Number 2
 Time Extension Required No
 Date Of Change Order 7/15/2026
 Change Order Amount To Date Increase

Construction Contingency

Calculations below are project wide. Remaining negative Construction Contingency may require the submission of a revised BG1.

Current Approved Amount	\$1,808,161.92
Net Approved COs	\$332,746.16
Remaining After Approved COs	\$1,475,415.76
Net All COs	\$1,567,582.06
Remaining After All COs	\$240,579.86

This Requested Change Order Amount \$186.45

+/-

Change In A/E Fee This Change Order

+/-

Change In CM Fee This Change Order \$0.00

+/-

Remaining Construction Contingency (\$942,614.34)

Balance

Contract Change Requested By Local Board of Education

Contract Change Reason Code Expansion of Scope

Change Order Description And Justification

Cost associated with the balance of PR 004. There was an error with the original PR 004 pricing.

Cost Benefit To Owner

The cost of this change order has been reviewed and determined to be reasonable.

Contract unit prices have been utilized No
 to support the cost associated with this

change order.

Detailed Cost Breakdown

Contract unit prices have not been utilized, provide a detailed cost breakdown which separates labor, material, profit and overhead.

Detail Item	Amount	Percent of Total
Labor		0.00%
Materials	\$186.45	100.00%
Profit and Overhead		0.00%
Bond Insurance		0.00%
Cost Breakdown Total:	\$186.45	

Cost for this Change Order supported by an alternate bid or competitive price quote

Explain Why

Executed contract with contractor.

Change Order Supplemental Information Form Signature Page (Online Form Ref# 65449)

Architect

Date

Construction Manager

Date

Finance Officer

Date

Local Board of Education Designee

Date