

Setts Gym lights



LM-79-08 Test Report

For

Morris Products Inc.

53 Carey Rd
Queensbury, NY 12804

Brand Name: Morris

LED HIGH BAY LIGHT Model:
71510(Fixture) with 71512(16" Prismatic Reflector)

Laboratory: Leading Testing Laboratories

NVLAP CODE: 200960-0
No.180S, DongLiu road, BinJiang District, Hangzhou, China
Tel: +86-571-56680806 www.ledtestlab.com

Report No.: HZI SU0041s

The laboratory that conducted the testing detailed in this report has been accredited for SSL by NVLAP.

Reviewed by:

April Zou

Engineer: April Zou
Dec. 09, 2015



Jim Zhang

Manager: Jim Zhang
Dec. 09, 2015

Note: This report does not imply product certification approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.



Cat# 71510
Classic High Bay
150 Watt
(Reflectors Sold Separately)
***Dimmable**





- Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs & LED Driver
- Corrosion Resistant Die Cast Aluminum Housing with Superior Architectural Bronze Powder Coat Finish, Stainless Steel Hardware & Eye-Hook Mount
- cULus listed for Wet Locations
- DLC Listed When used with Reflector(Sold Separately)
- 5 Year Warranty
- No preheating time, no cooling required before restart
- Note: Reflector (Sold Separately) must be installed for DLC Eligibility (See MORRIS Cat# 71503 60° Reflector; 71502 120° Reflector; 71503 12° PC Reflector)

Model : 71510


OVERALL LAMP PARAMETERS	Input Voltage	100-277VAC
	Input Current	2A @100V / 0.70A @277VAC
	Input Power	150W
	Power Factor	PF≥ 0.95
	Luminance	15000 LM
	Luminous Efficiency	100 LM/W
	CRI	>83
	Beam Angle	120° or 60° (Depending on Reflector)
	Main Structure	Aluminum
LED DRIVER	Driver Manufacturer	Meanwell
	Output Voltage	40-88VDC
	Output Current	3.2A
	Driver Efficiency	92%
LED	LED Brand	3030 1W
	LED Quantity	182 PCS
	LED Manufacturer	PHILIPS Lumiled Luxeon 3030
	LED Efficacy	110 LM/W
	Color Temperature	5000K
LIFESPAN & ENVIRONMENT	Lifespan	50000 Hrs+
	Warranty	5 Years
	IP Rating	IP65 Wet Locations
	Operating Temperature	-40°F - 131°F
	Storage	-40°C → 80°C, 10-90% RH
SAFETY&EMC	Safety Norms	UL1598, UL8750, IEC60598, IEC61347-2-13, IEC62031, IEC62471
	Withstand Voltage	I/P-FG: 2121VDC
	Grounding Resistance	25A 100mΩ
	Electromagnetic	EN55015, EN61000-2-3, EN61000-3-3, EN61547
	Dimension	Pls refer to attached dimension drawing
OTHERS	Net Weight	4.2 KG
	Gross Weight	4.6 KG
	Packing Size	480*480*240 mm
	Q'ty / Carton	4 PCS
	Volume	—

Dimensional Line Art


Cat# 71510

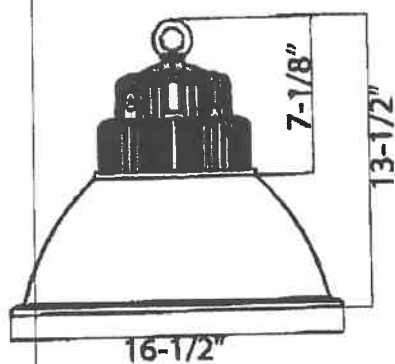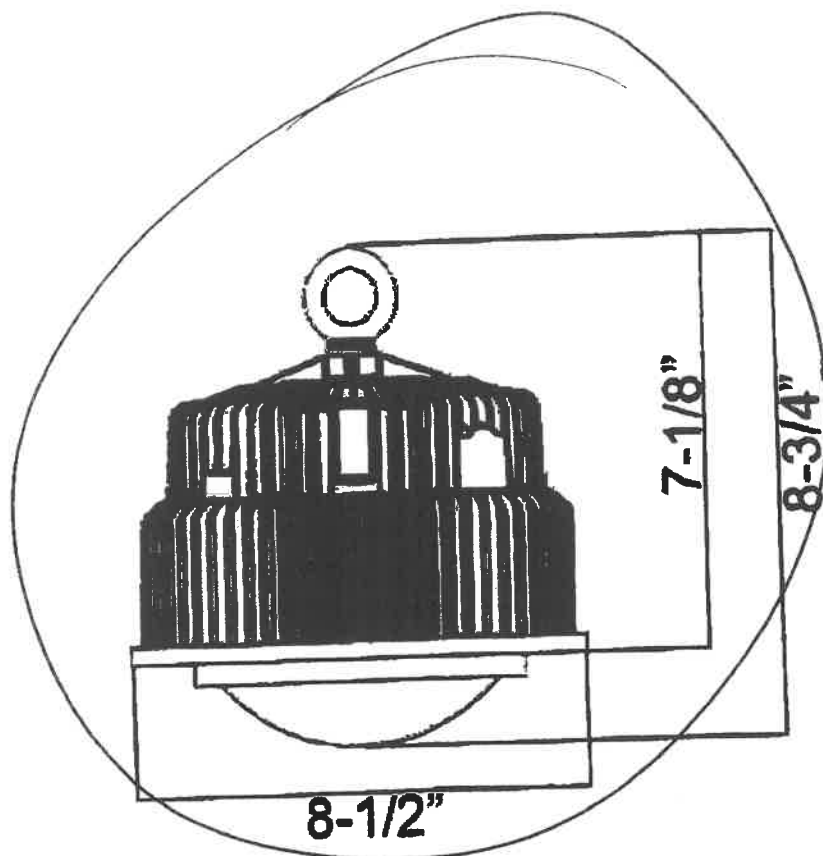

71511 60° Aluminum Reflector

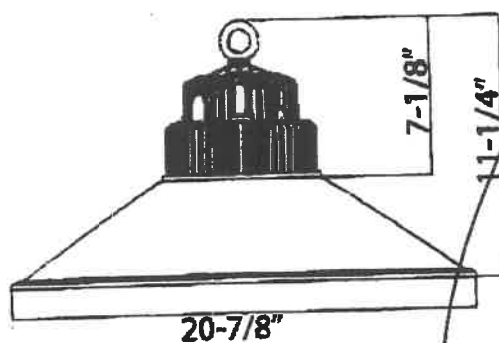

71512 120° Aluminum Reflector

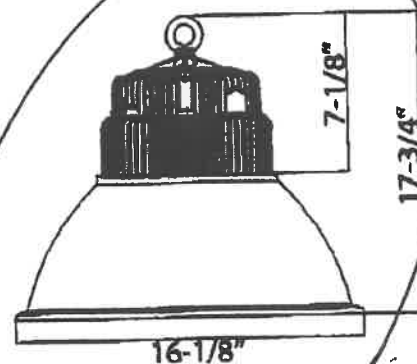

~~71508~~ 16" PolyCarbonate Reflector

71508

Quote Htt Jim Oliver !!
FOR e104415

Patron's Home Center & Electric Outlet

616 Bloomfield Rd.

PO BOX 308

Bardstown, KY 40004

502-348-2875 Fax: 502-348-6251

patrons.doitbest.com

Report Date: 6/6/2018 11:10:54 AM

Patron's Home Center 502-348-2875
& Electric Outlet 502-348-6363
616 Bloomfield Rd
Bardstown, KY 40004

Transaction#: E104415
Associate: Steve
Date: 06/06/2018 Time: 11:10:20 AM

*** QUOTE ***

Bill To:
Customer # 4319
SPENCER CO BOARD OF EDUC
207 WEST MAIN STREET
TAYLORSVILLE, KY 40071
502-477-3250

FIXTURE HIGH BAY BODY150W
71510
29.00 EACH @ \$186.70 N \$5,414.30
(Reg Price \$199.00)
PC SHADE 16" HI-BAY 150W
71508
29.00 EACH @ \$39.75 N \$1,152.75
(Reg Price \$52.99)

Subtotal: \$6,567.05
TAX EXEMPT
TOTAL: \$6,567.05

As a valued customer, you have
saved \$740.66 on this purchase

(X) _____
Authorized Signature

Thank You!
Remember, if it is worth doing...
Do it Best with Patrons!

